


# CONCRETE MICRO-HAMMERING SYSTEM

Ref.  
104



new

see our  
video on  
YouTube



## WALLSTER

### Hammer drill bit compatible SDS-plus

#### Features


- Semi positive carbide tip.
- Tip angle 130°.
- Short shaped length.
- Elongated pitch.
- Hammering reducer.
- Compatible SDS-plus shank.

#### Benefits

- The hammering reducer generates micro percussion and keeps the walls of the block safe from damage.
- Calibrated hole.
- Increased anchoring strength.
- The unshaped part of the flute provides rigidity and guides the bit along the line over the entire drilling depth.
- The flute shape makes removal easier while drilling through insulating material.

#### EFFICIENT IN ALL HOLLOW BLOCKS OF THE MARKET


Slap, breeze block, breeze block Easytherm®, Rubbe, hollow brick, brick for bonding, brick pole, brick rabbet Wienerberger®, plank, brick of arase...



*Diager developed specially a bit to drill hollow blocks without degrading walls. This special dill bit for hollow blocks allows to realize qualitative holes which enhance reliability of the anchorings.*



Ø	Ref.	Gencod	Qt.
<b>L 100 x 160</b>			
5	104D05L0160	3336600187214	1
6	104D06L0160	3336600187221	1
8	104D08L0160	3336600187238	1
10	104D10L0160	3336600187245	1
<b>L 200 x 260</b>			
6	104D06L0260	3336600182240	1
8	104D08L0260	3336600182103	1
10	104D10L0260	3336600182110	1
12	104D12L0260	3336600182127	1
14	104D14L0260	3336600182134	1
16	104D16L0260	3336600182141	1
<b>L 400 x 460</b>			
8	104D08L0460	3336600182158	1
10	104D10L0460	3336600182165	1



PLV picking-counter  
Delevry unmounted  
Ref.C00084

**UP TO 3  
TIMES  
STRONGER  
RESISTANCE**

**COMPARATIVE TESTS : DRILLING AND ANCHORING IN A HOLLOW BLOCK**

**STANDARD Drill bit**



**250 Kg**  
↑  
Pull out resistance

**Drilling**  
The wall is damaged, only 7mm thickness remains.

**Test of tearing for a chemical fixing**  
The fixation quickly gives in. Break in 250 kg.



**Hammer drill WALLSTER**




**700 Kg**  
↑  
Pull out resistance

**Drilling**  
The wall is intact, and keeps its original thickness of 16mm.

**Test of tearing for a chemical fixing**  
The fixation resists perfectly. It is the wall which gives in. Break in 700 kg.

Tests made with a SDS + machine GBH 2 with hammering in hollow concrete block with a chemical anchor.

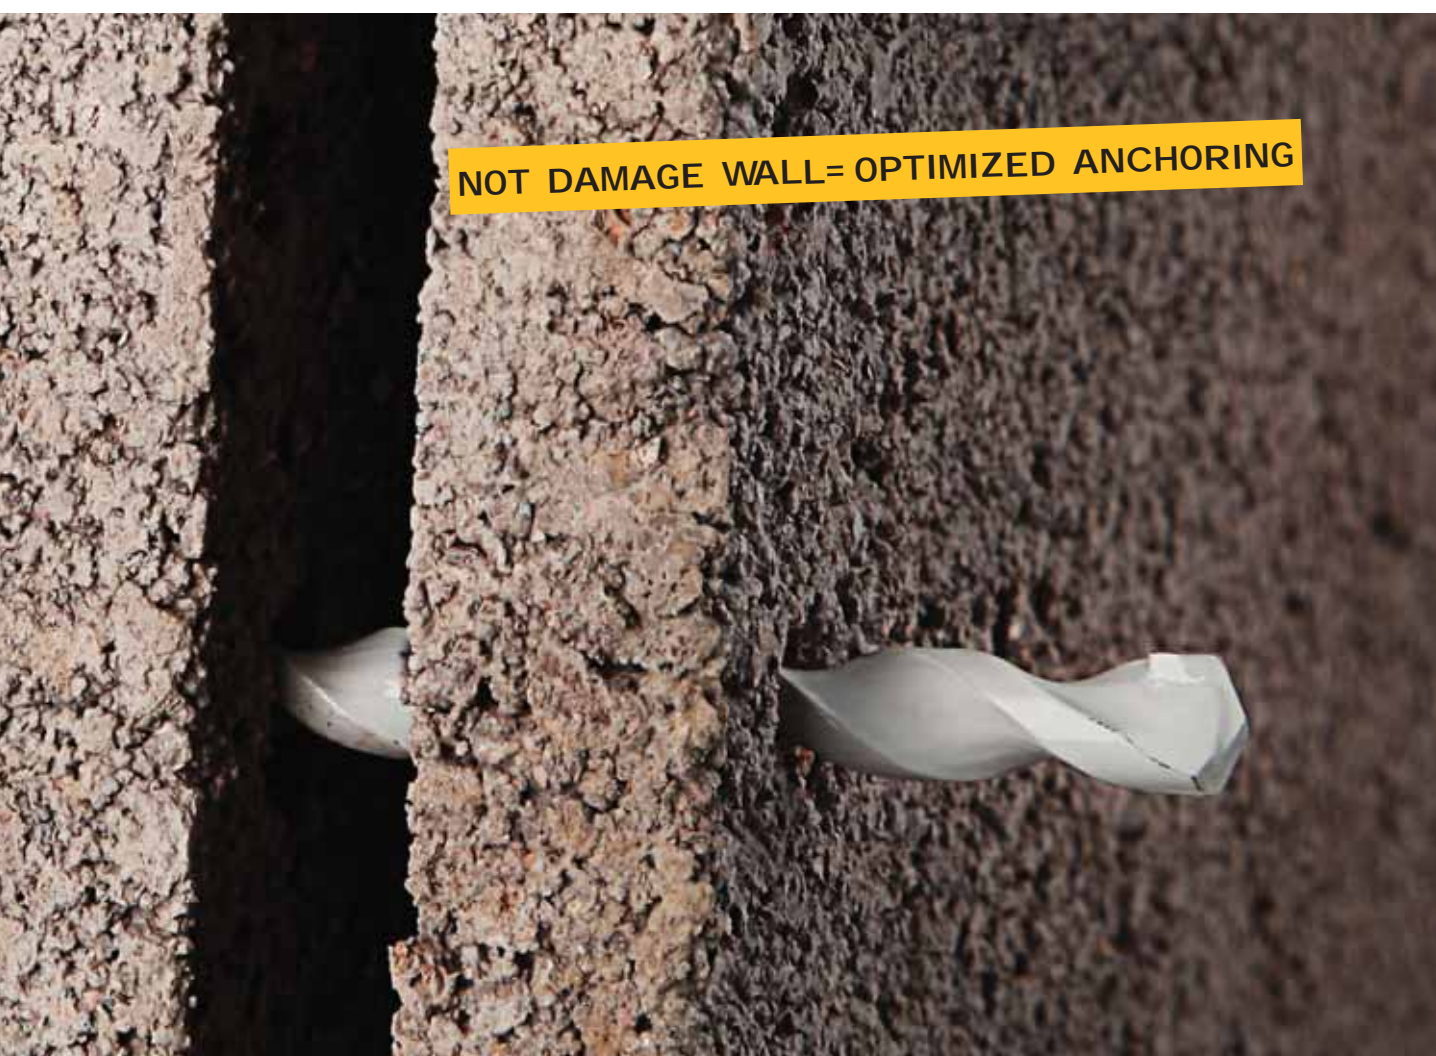

**NOT DAMAGE WALL = OPTIMIZED ANCHORING**