


PRODUCT INFORMATION SHEET

Pneumatic straight sander

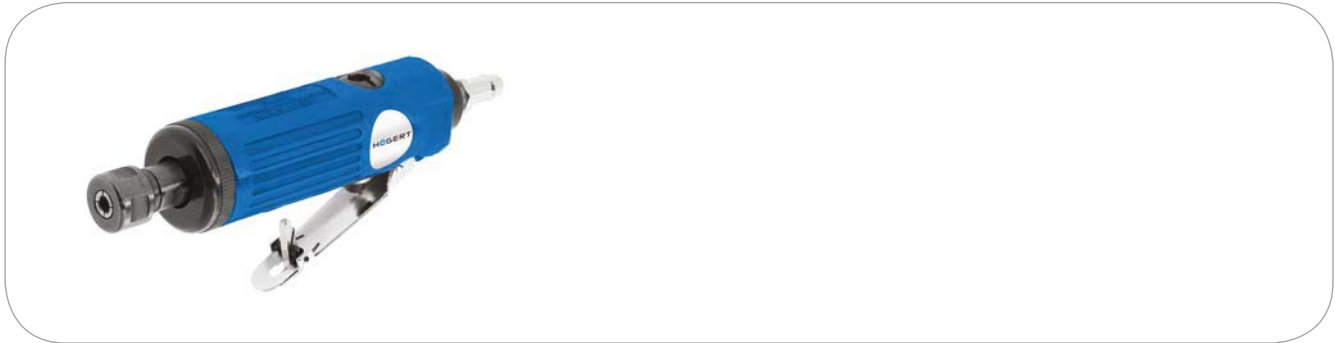

Characteristic

- used in automotive services and industry, intended for cutting, polishing and grinding;
- a lock in the switch protects against unintentional starting;
- trigger lever allows smooth power and speed regulation;
- 360° rotary air outlet allows air to be directed away from the operator;
- lightweight aluminium body and small dimensions ensure work comfort;
- wrenches for fixing additional equipment to the handle included, connection for compressed air installation;
- spindle diameter 6 mm;
- air connection 1/4";
- working pressure 6.2 bar / 90 psi;
- air intake 113 l/min;
- rotation speed of 22.000 RPM.

Technical data

HÖGERT				
HT4R650	5902801213731	length 173 mm	5 pcs.	20 pcs.

3-6 mm	MAX 0.62 MPa / 90 PSI	113 l/min	max: 22000 R.P.M.	173 mm
--------	-----------------------	-----------	-------------------	---------------