

# Eco Designfloor with O.R.C.A. Moisture Defense Technology



# ECO Designfloor • Waterresistant Wood Flooring\*

*with O.R.C.A. Moisture Defense Technology*



\*Consists of natural wood and an organic chemical binder, 24 h waterresistant according to NALFA and 100 h+ according to KRONOSPAN company standard WN-101, [www.100hour-test.com](http://www.100hour-test.com)



# ECO Designfloor • Waterresistant Wood Flooring\*

*with O.R.C.A. Moisture Defense Technology*

**O.R.C.A.®**

MOISTURE DEFENSE TECHNOLOGY



Range	Plank Size	Thickness	Abrasion Class	Utilization Class	Locking System	Sound Absorption	O.R.C.A. Moisture Defense Technology	SKUs
Organic Flex	1288 x 193 mm	7 mm	–	34	1clic 2go pure+	1 mm Cork	24 h NALFA + 100 h+	8
Organic Long	2003 x 195 mm	8 mm	AC5	33	1clic 2go pure+	–	24 h NALFA + 100 h+	6
Organic Classic	635 x 327 mm 1285 x 192 mm	8 mm	AC5	33	1clic 2go pure	–	24 h NALFA + 100 h+	17
Organic Clever Long	2003 x 245 mm	6 mm	AC5	32	1clic 2go pure+	–	24 h NALFA + 100 h+	6
Organic Clever Silent	1288 x 195 mm	6+1 mm	AC5	32	1clic 2go pure+	1 mm PS silent pad	24 h NALFA + 100 h+	9
Organic Clever	1288 x 195 mm	6 mm	AC5	32	1clic 2go pure+	–	24 h NALFA + 100 h+	8

Σ 54


\*Consists of natural wood and an organic chemical binder,  
24 h waterresistant according to NALFA and 100 h+ according to KRONOSPAN company standard WN-101,  
[www.100hour-test.com](http://www.100hour-test.com)

# ECO Designfloor • Waterresistant Wood Flooring\*

*with O.R.C.A. Moisture Defense Technology*




- short fiber length and geometry reduces potential expansion
- each fiber is encapsulated with a special binder that prevents it from absorbing water
- micro-expansion on the edges seals the connection between planks

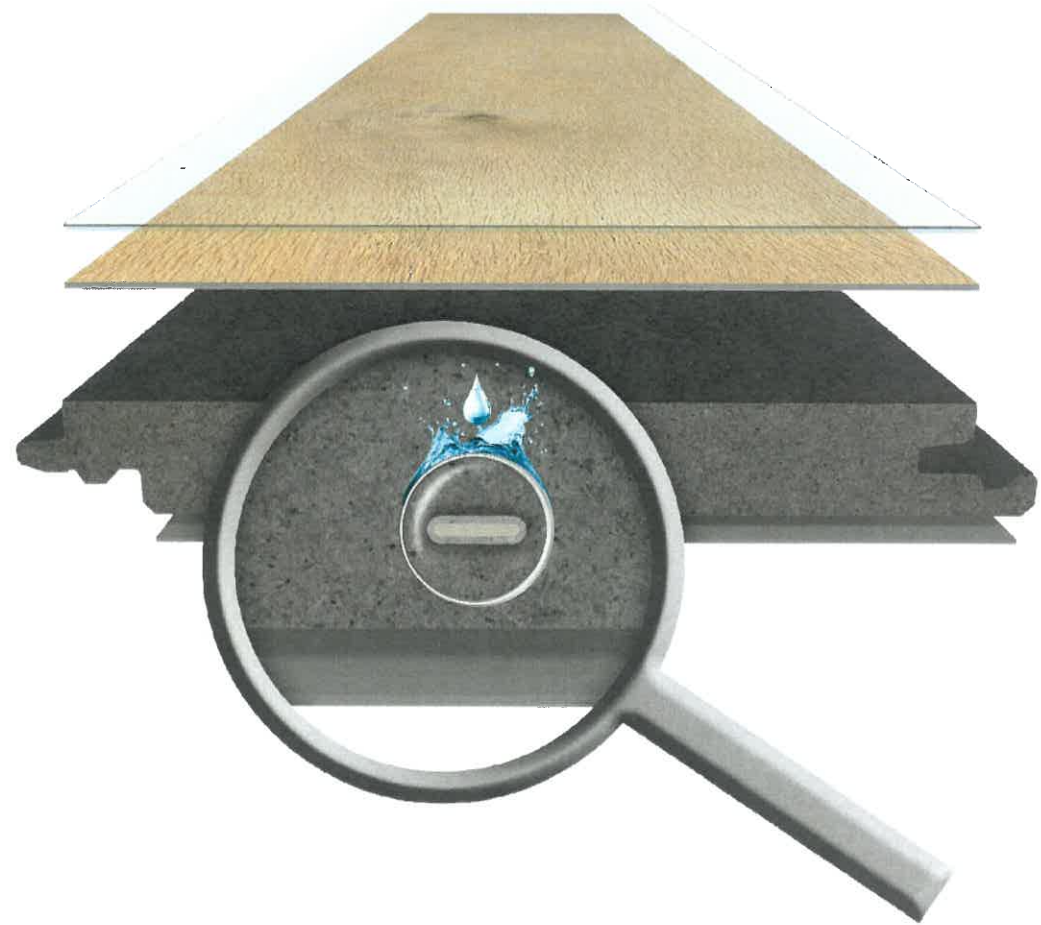

\*Consists of natural wood and an organic chemical binder,  
24 h waterresistant according to NALFA and 100 h+ according to KRONOSPAN company standard WN-101,  
[www.100hour-test.com](http://www.100hour-test.com)

# Organic Clever Silent – Features

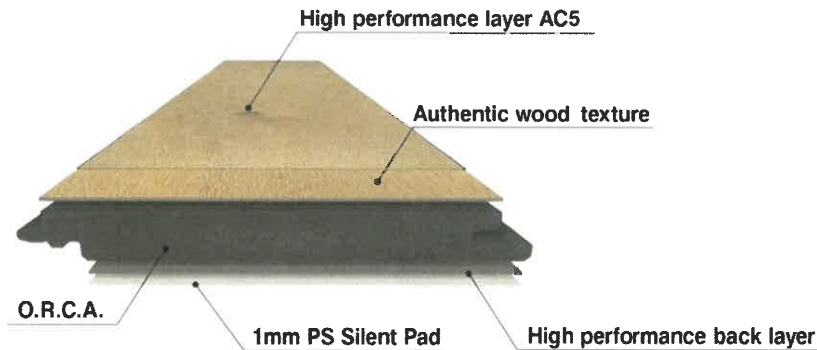

## Plank size

7.68" x 50 3/4" 195 x 1288 mm	6+1 mm
----------------------------------	--------


## Packaging information

9 planks/pack. = 24.32 sqft., 28.75 lbs/pack
9 planks/pack. = 2,26 m <sup>2</sup> , 13,04 kg/pack
52 packs/pallet = 1264.76 sqft. = 468 planks, 1544 lbs/pallet
52 packs/pallet = 117,54 m <sup>2</sup> = 468 planks, 700 kg/pallet

## Shipping details

20 ft. container 22 pal. = 2586 m <sup>2</sup> = 27,825 sqft.
40 ft. container 30 pal. = 3526 m <sup>2</sup> = 37,943 sqft.

## Features

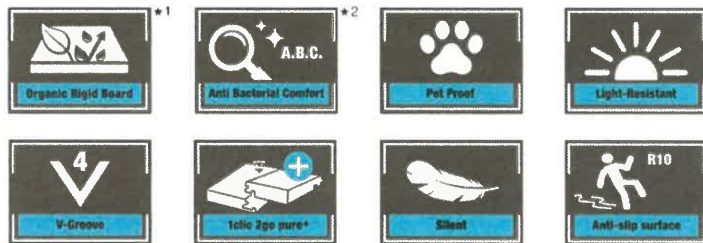

\*1 Consists of natural wood and an organic chemical binder  
 \*2 Tested germs: Staphylococcus aureus  
 \*3 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com  
 \*4 May contain traces of PVC from f.e. packaging  
 \*5 O.R.C.A. boards are CO<sub>2</sub> neutral, because the production process of transforming a tree into O.R.C.A. emits less CO<sub>2</sub> than the tree itself has stored.