


Export

Art. 1034R

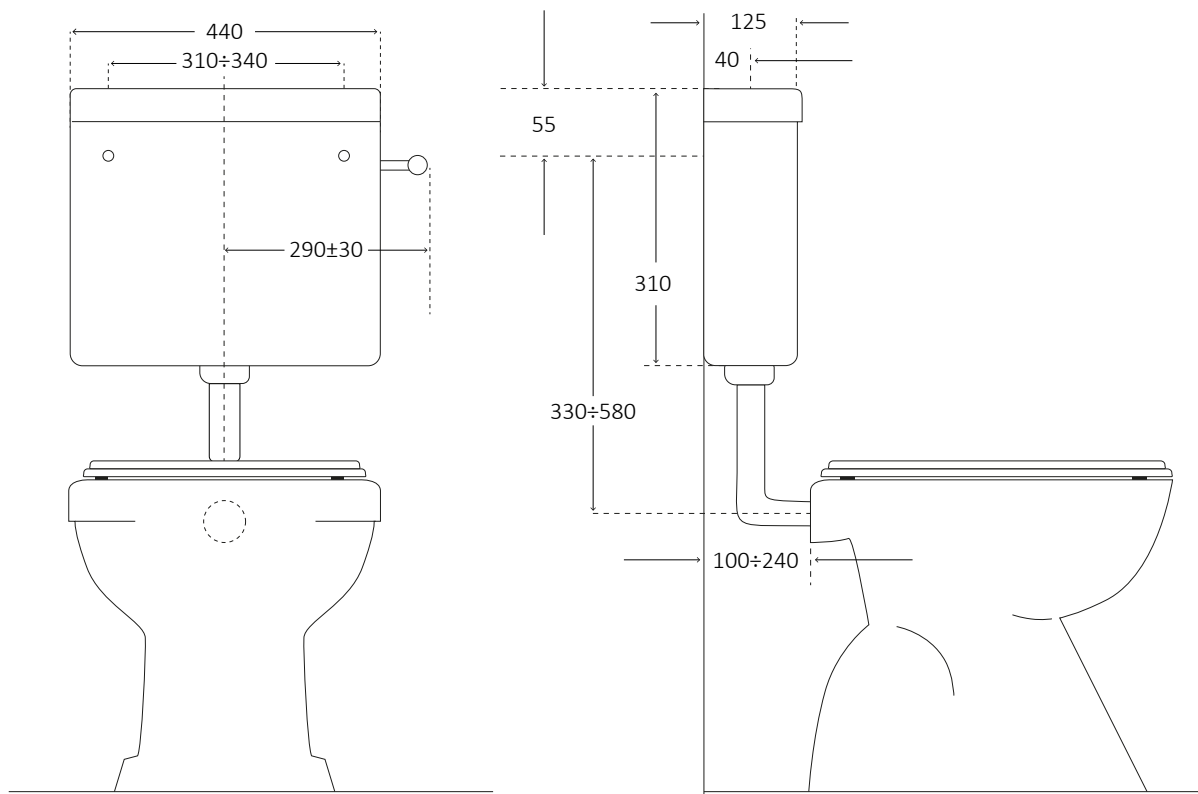

Utilizare

Instalare pe perete, la semiinaltime

Caracteristici

Izolant anticondens
 Robinet flotor 3/8" compact, rapid si silentios
 Racordarea la sursa de apa: stanga sau dreapta
 Buton cu actionare start-stop, pentru economie de apa
 Corp din ABS tratat anti-imbatranire

Informatii tehnice

Material :	ABS
Capacitate:	7 litri
Volum de apa reglabil :	6-7 litri
Setare standard a cantitatii de umplere :	6,5 litri
Durata de umplere (7 l) cu presiune dinamica de 3 bar :	56 sec
Model vas wc :	pe pardoseala
Actionare :	mecanica

Continut pachet

Robinet flotor compact 3/8", stut plastic
 Mecanism wc
 Piulita
 Garnitura
 Punte pentru descarcare totala
 Punte de susținere pentru alimentare apa central-posterioara
 Teava scurgere ø 50x40 pentru rezervor wc la semi-inaltime
 Kit de fixare pe perete

Articole

1034R Export alb start/stop

Field of application

External installation for medium level installation

Features

Anti-condensate and soundproofing insulation
 3/8" compact floating valve, safe, quick and silent
 Water connection right or left
 Single button with water-saving start/stop
 ABS body with anti-age treatment

Technical informations

Material :	ABS
Capacity :	7 litres
Adjustable rinsing volume :	6-7 litres
Standard setting of filling quantity:	6,5 litres
Filling duration (7 l) with a dynamic pressure of 3 bar	56 sec
Type of wc:	at floor
Type of drive :	mechanical

Equipment

3/8" compact floating valve, with pom tang
 Outlet valve
 Outlet valve nut
 Outlet valve gasket
 Lever for total flush
 Bridge for back entry
 Outlet pipe ø 50x32 for external low level cistern
 Wall fixing kit

Items

1034R Export start/stop flush white