Eco Designfloor with O.R.C.A. Moisture Defense Technology






## **ECO Designfloor • Waterresistant Wood Flooring\***

with O.R.C.A. Moisture Defeuse Technology



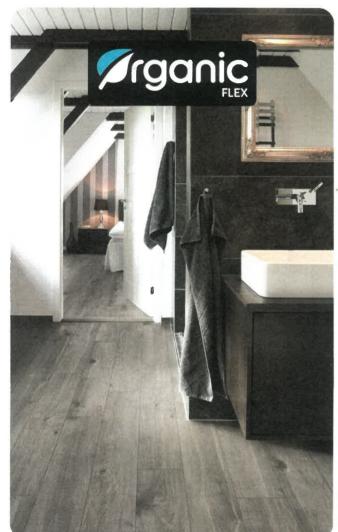











## **ECO Designfloor • Waterresistant Wood Flooring\***

# with O.R.C.A. Moisture Defeuse Technology



O.R.C.A.	Range	Plank Size	Thickness	Abrasion Class	Utilization Class	Locking System	Sound Absorption	O.R.C.A. Moisture Defen- se Technology	SKUs
<b>Irganic</b>	Organic Flex	1288 x 193 mm	7 mm		34	1clic 2go pure+	1 mm Cork	24 h NALFA + 100 h+	8
<b>Inganic</b>	Organic Long	2003 x 195 mm	8 mm	AC5	33	1clic 2go pure÷		24 h NALFA + 100 h+	6
<b>Ørganic</b> cLASSIC	Organic Classic	635 x 327 mm 1285 x 192 mm	8 mm	AC5	33	1clic 2go pure		24 h NALFA + 100 h+	17
<b>Inganic</b> CLEVER LONG	Organic Clever Long	2003 x 245 mm	6 mm	AC5	32	1clic 2go pure+		24 h NALFA + 100 h+	6
Figanic CLEVER SILENT	Organic Clever Silent	1288 x 195 mm	6+1 mm	AC5	32	1clic 2go pure+	1 mm PS silent pad	24 h NALFA + 100 h+	9
/rganic CLEVER	Organic Clever	1288 x 195 mm	6 mm	AC5	32	tclic 2go pure+		24 h NALFA + 100 h+	8

Σ 54



<sup>\*</sup>Consists of natural wood and an organic chemical binder,


<sup>24</sup> h waterresistant according to NALFA and 100 h+ according to KRONOSPAN company standard WN-101, www.100hour-test.com

## **ECO Designfloor • Waterresistant Wood Flooring\***

## with O.R.C.A. Moisture Defeuse Technology



- short fiber length and geometry reduces potential expansion
- each fiber is encapsulated with a special binder that prevents it from absorbing water
- micro-expansion on the edges seals the connection between planks

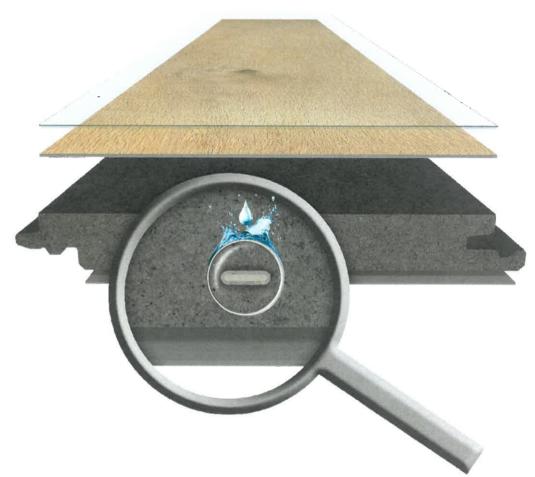

<sup>\*</sup>Consists of natural wood and an organic chemical binder, 24 h waterresistant according to NALFA and 100 h+ according to KRONOSPAN company standard WN-101, www.100hour-test.com




### **Organic Classic – Features**









**Authentic Wood/Tile Texture** 

#### Plank size

7.56" x 501/2" 192 x 1285 mm

12.87" x 25" 327 x 635 mm

8 mm

8 mm

### **Features**























GRYKYMAFED	/ DV/C \	1 0
9	FVC	
SAMP. WHITE	/ EDEE /	MELL
WE DEFENSE TECHNIC	1111	INCO

- \*1 Consists of natural wood and an organic chemical binder
- \*2 Tested germs: Staphylococcus aureus
- 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com
- \*5 May contain traces of PVC from f.e. packaging
- \*\* O.R.C.A. boards are CO, neutral, because the production process of transforming a tree into O.R.C.A. emits less CO, than the tree itself has stored.

