

MASTERCcolour CDM-TC

MASTERCcolour CDM-TC 70W/830 G8.5 1CT

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light



Product data

• General Characteristics

Cap-Base	G8.5
Bulb	T14 [T 14 mm]
Bulb Material	UV-Block Quartz
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	11000 hr
Life to 50% failures EL	12000 hr

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	83 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	2915 K
Luminous Flux Lamp EL	6400 Lm
Luminous Efficacy Lamp EL	88 Lm/W
Lumen Maintenance EL 2000h	85 %
Lumen Maintenance EL 5000h	75 %
Lumen Maintenance EL 10000h	65 %
Design Mean Lumens EL	5100 Lm

Chromaticity Coordinate X	0.439 -
Chromaticity Coordinate Y	0.398 -

• Electrical Characteristics

System Power EL	83 W
Lamp Wattage	70 W
Lamp Wattage EL 25°C, Rated	73.0 W
Lamp Wattage EL 25°C, Nominal	70.0 W
Lamp Voltage	83 V
Lamp Current EL	0.87 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Ignition Peak Voltage	3500 (min) V
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	4.5 mg
Energy consumption kWh/1000h	80 kWh

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.3 (max) - 8 (min) h500lx
--------------------------------	----------------------------

PHILIPS

MASTERColour CDM-TC

• Luminaire Design Requirements

Pinch Temperature	300 (max) C
Bulb Temperature	550 (max) C

• Product Dimensions

Overall Length C	85 (max) mm
Diameter D	15 (max) mm
Light Center Length L	51 (min), 52 (nom), 53 (max) mm
Arc Length O	7 mm
Light Center Length L [inch]	2 in
Overall Length C [inch]	3.34375 (max) in
Diameter D [inch]	0.5 in

• Product Data

Order code	928086505131
------------	--------------


Full product code	928086505131
Full product name	MASTERColour CDM-TC 70W/830 G8.5 1CT
Order product name	MASTERC CDM-TC 70W/830 G8.5 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500201676
Bar code on outerbox - EAN3	8711500201683
Logistic code(s) - 12NC	928086505131
ILCOS code	MT/UB-70/830-H-G8.5-17/85
Net weight per piece	0.010 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

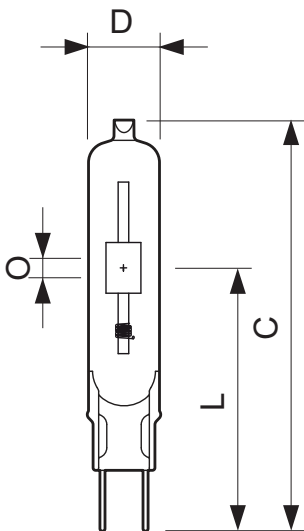

MASTERColour CDM-TC 70W/830 G8.5 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-TC 70W/830 G8.5	85	15	51	52	53	7

Dimensional drawing



G8.5

Photometric data

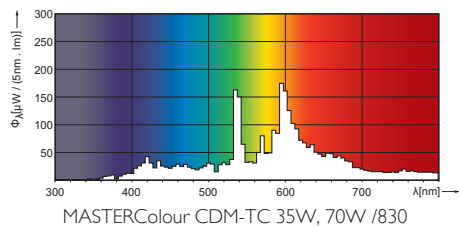

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 24
data subject to change