


SPC Ultra 600+

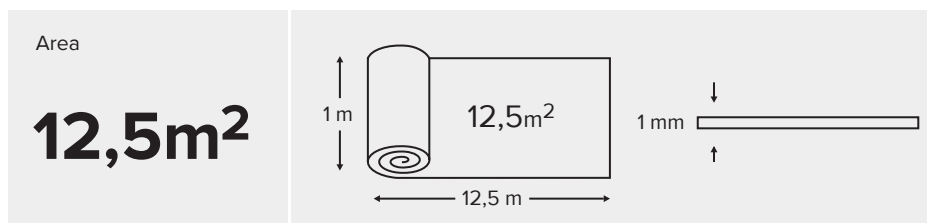

Floor underlay manufactured from high density PE foam

PE	Material		High Density Polyethylene (300 kg/m3)	NORMA
	CS	Pressure resistance	≥600 kPa	EN 16354 EN 826
	CD	Permanent misshapement after pressure	<20 %	EN ISO 1856
	R	Heat resistance	<0,03 m²K/W	EN 12667
	SD	Water absorption	<5 %	EN 12087
	λ	Heat conductivity	>0,033 W/mK	EN 12667
	DL75	Permanent elasticity	>250000 cycles	EN 16354 EN 13793
	PC	Floor leveling	≥0,5 mm	EN 16354 ISO 868
	Thickness		1 mm	EN 16354 EN 823
	Length		12,5 m	EN 16354 EN 822
	Width		1 m	EN 16354 EN 822

USES:

Underlay recommended for vinyl floors with a hard core (SPC, LVT) and click system installation. In case of heated floor, vapor proof foil is required.

PROPERTIES:

High pressure resistance, high dynamic weight resistance, floor leveling, moisture absorption, low heat resistance. No plasticizers, asbestos, formaldehydes, halogenes or heavy metals.

STORAGE:

Keep indoors, protect from the sun.

INSTALLATION:

Easy to cut with a razor blade. Connect the underlay strips with the designated tape.