



2P+E multi-outlet adapters 2 and 3 front outputs

Cat. No(s): 0 494 31/32/33/34
 6 945 16/17/18/19



0 494 31/32



6 945 18/19


1. USE

For connection to 2P+E wall outlets.
 2 or 3 front outputs.

2. RANGE

| Description | French-Belgian standard | | German standard | |
|--|-------------------------|-----------------|------------------|-----------------|
| | White/Light Grey | Black/Dark Grey | White/Light Grey | Black/Dark Grey |
| 2P+E multi-outlet adapters with safety shutter, 2 front outputs with reversed recesses to make it easier to plug in appliances. | 0 494 31 | 0 494 32 | 6 945 16 | 6 945 17 |
| 2P+E multi-outlet adapters with safety shutter, 3 front outputs with central outlet at a 45° angle and left and right outlets with reversed recesses to make it easier to plug in appliances. | 0 494 33 | 0 494 34 | 6 945 18 | 6 945 19 |

3. DIMENSIONS (mm)

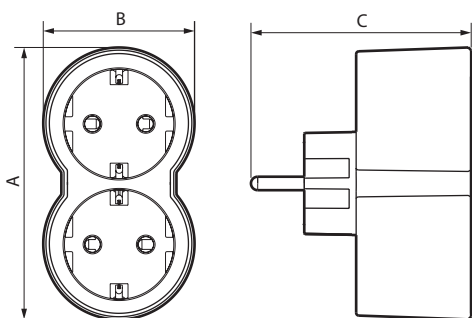

| Cat. Nos | A | B | C |
|---------------------------|-----|----|------|
| 0 494 31/32 - 6 945 16/17 | 97 | 54 | 78,5 |
| 0 494 33/34 - 6 945 18/19 | 140 | 54 | 77 |

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 04
 Protection against solid bodies and liquids: IP 20

■ 4.2 Material characteristics

Matt Plastic
 White RAL 9003/Light Grey RAL 7047
 Black RAL 9017/Dark Grey RAL 7024

Halogen-free
 UV-resistant

Self-extinguishing:

750°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 4.3 Electrical characteristics

Voltage: 230 V~
 Frequency: 50 Hz
 Current: 16 A
 Power: max. 3680 W

■ 4.4 Climate characteristics

Usage temperature: -5°C to +35°C
 Storage temperature: -20°C to +70°C

5. CARE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene..

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards

See e. catalogue.