

27.04.22


# Technical Data Sheet

## Universal Float Valve

Honest General Trading SRL  
 CIF: RO 6615609  
 Reg.Com: J40/25279/1994  
 Head Office: Agricultori 121 street,  
 Sector 3, Bucharest  
 www.honest.ro



HGT code	Name	Size	Type nozzle	G[kg]	EAN Code	Packing	Description																														
680024	Robinet Flotor Universal Vas WC Incarcare Verticala-Orizontala	3/8"	PP	0.274	5949094039235	1/50	<table border="1"> <tr> <td>Main Material</td> <td>PP</td> </tr> <tr> <td>Gasket material</td> <td>Rubber</td> </tr> <tr> <td colspan="2">Plastic screw&amp;nut, G3/8"</td> </tr> <tr> <td colspan="2">Both bottom inlet and side inlet are available</td> </tr> <tr> <td colspan="2">Two-piece float, quick water stop</td> </tr> <tr> <td colspan="2">Stable water level &amp; easy water level adjustment</td> </tr> <tr> <td colspan="2">Filling rate: 4.5L / min at 0.5 bar</td> </tr> <tr> <td colspan="2">Life Span: 200,000 cycles</td> </tr> <tr> <td colspan="2">Working pressure: 0.2-14bar</td> </tr> <tr> <td>Exposure mode</td> <td>CU</td> </tr> <tr> <td>Method of testing</td> <td></td> </tr> <tr> <td colspan="2"><b>- Warranty Certificate and instruction required</b></td> </tr> <tr> <td colspan="2">Guarantee for 5 years</td> </tr> <tr> <td>Individual packing Type</td> <td>Carton box</td> </tr> <tr> <td colspan="2">- N.W.*=net weight.</td> </tr> </table>	Main Material	PP	Gasket material	Rubber	Plastic screw&nut, G3/8"		Both bottom inlet and side inlet are available		Two-piece float, quick water stop		Stable water level & easy water level adjustment		Filling rate: 4.5L / min at 0.5 bar		Life Span: 200,000 cycles		Working pressure: 0.2-14bar		Exposure mode	CU	Method of testing		<b>- Warranty Certificate and instruction required</b>		Guarantee for 5 years		Individual packing Type	Carton box	- N.W.*=net weight.	
Main Material	PP																																				
Gasket material	Rubber																																				
Plastic screw&nut, G3/8"																																					
Both bottom inlet and side inlet are available																																					
Two-piece float, quick water stop																																					
Stable water level & easy water level adjustment																																					
Filling rate: 4.5L / min at 0.5 bar																																					
Life Span: 200,000 cycles																																					
Working pressure: 0.2-14bar																																					
Exposure mode	CU																																				
Method of testing																																					
<b>- Warranty Certificate and instruction required</b>																																					
Guarantee for 5 years																																					
Individual packing Type	Carton box																																				
- N.W.*=net weight.																																					

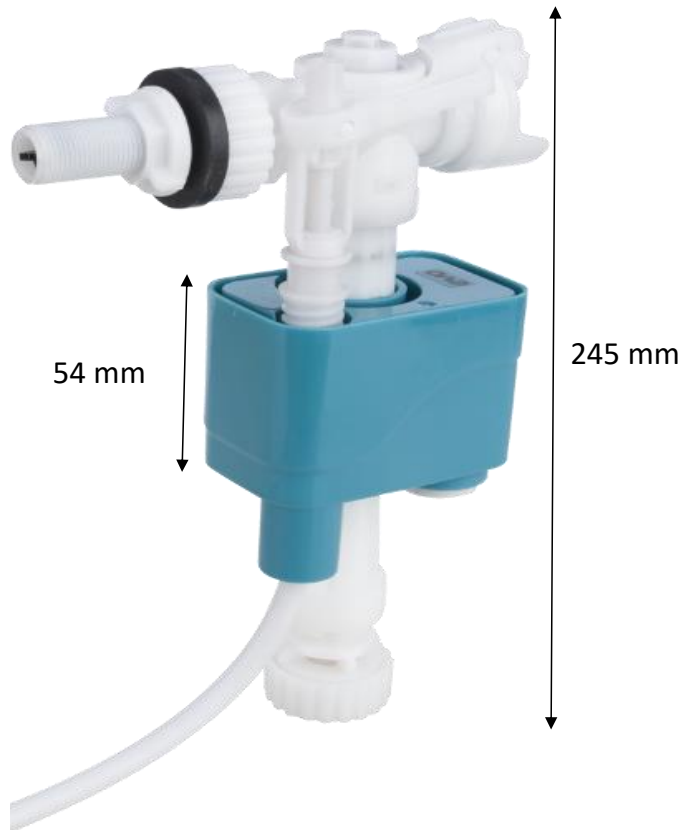



Logo EVO must be engraved here