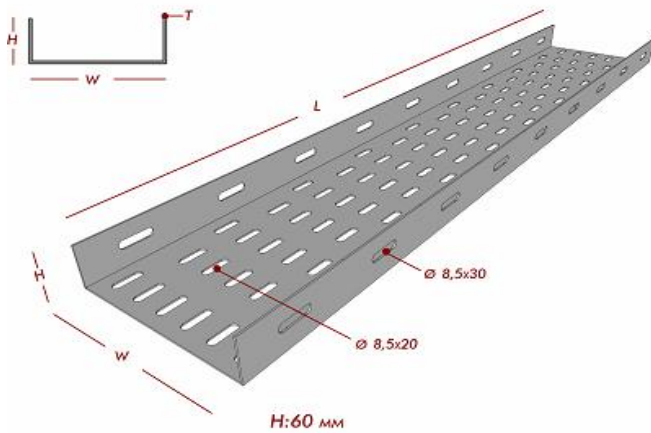


## Normal Type Cable Trays - SPK Series

**60**  
 Side Height


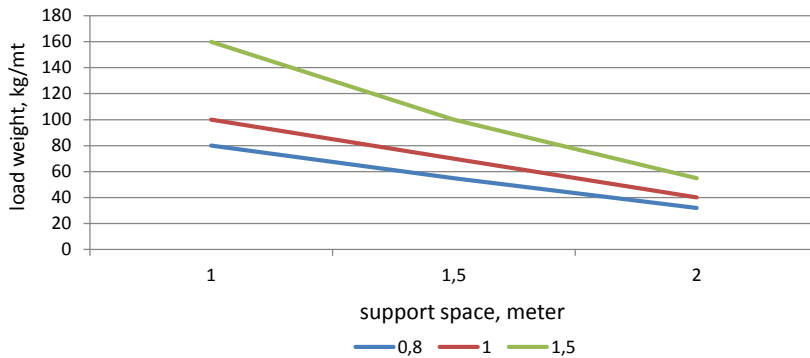
| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/m | Order Code (PG)  |
|--------------|----------------|-----------------------|-------------|------------------|
| SPK 610 08   | 100            | 0,80                  | 1,382       | 1000 60 100 08 1 |
| SPK 616 08   | 160            | 0,80                  | 1,758       | 1000 60 160 08 1 |
| SPK 620 10   | 200            | 1,00                  | 2,512       | 1000 60 200 10 1 |
| SPK 626 10   | 260            | 1,00                  | 2,983       | 1000 60 260 10 1 |
| SPK 630 10   | 300            | 1,00                  | 3,297       | 1000 60 300 10 1 |
| SPK 640 15   | 400            | 1,50                  | 6,123       | 1000 60 400 15 1 |
| SPK 650 15   | 500            | 1,50                  | 7,301       | 1000 60 600 15 1 |
| SPK 660 15   | 600            | 1,50                  | 7,654       | 1000 60 600 15 1 |

\*Standard Length(L) 3000mm / on request 2500mm

\*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt &amp; Nuts

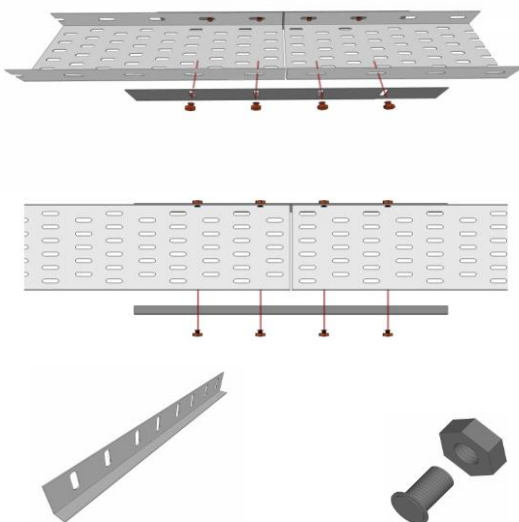
\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**H: 60 Normal Type Cable Tray Load Graph**


| Width, (W) mm | Useful Area cm <sup>2</sup> |
|---------------|-----------------------------|
| 50            | 12,5                        |
| 100           | 25                          |
| 160           | 40                          |
| 200           | 50                          |
| 260           | 65                          |
| 300           | 75                          |
| 400           | 100                         |
| 500           | 125                         |
| 600           | 150                         |

## Straight Connector

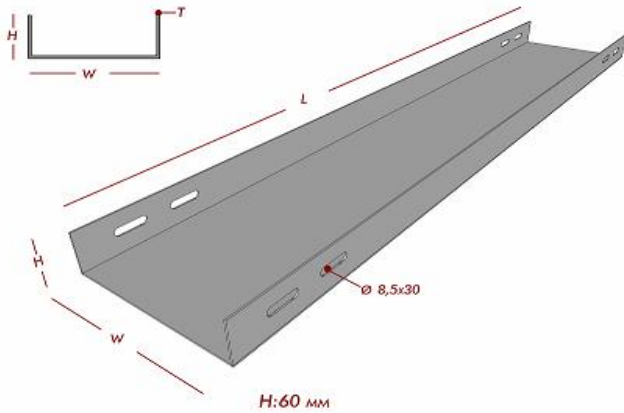


| Model Number | Length (mm) | Plate Thick. (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|-------------|-------------------|---------------|------------------|
| KBE 260 10   | 120         | 1                 | 0,071         | 8002 60 120 10 1 |
| BE 260 10    | 240         | 1                 | 0,141         | 8002 60 240 10 1 |
| BE 260 15    | 240         | 1,5               | 0,212         | 8002 60 240 15 1 |

\*Each Connector needs 4 sets of M8 Bolt &amp; Nuts.....

| Model Number | Length (mm) | Diameter, (mm) | Weight kg/set | Order Code (PG)  |
|--------------|-------------|----------------|---------------|------------------|
| CS M8        | 15          | 8              | 0,012         | 9000 08 015 00 1 |

## Normal Type Non Perforated Cable Trays - SDK Series

**60**  
 Side Height


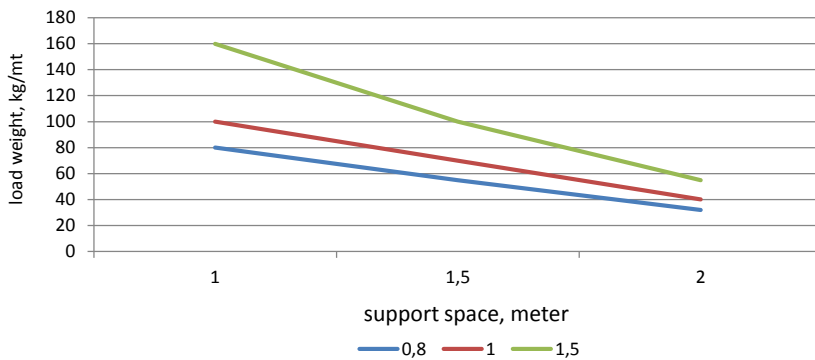
| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/m | Order Code (PG)  |
|--------------|----------------|-----------------------|-------------|------------------|
| SDK 610 08   | 100            | 0,80                  | 1,382       | 1100 60 100 08 1 |
| SDK 616 08   | 160            | 0,80                  | 1,758       | 1100 60 160 08 1 |
| SDK 620 10   | 200            | 1,00                  | 2,512       | 1100 60 200 10 1 |
| SDK 626 10   | 260            | 1,00                  | 2,983       | 1100 60 260 10 1 |
| SDK 630 10   | 300            | 1,00                  | 3,297       | 1100 60 300 10 1 |
| SDK 640 15   | 400            | 1,50                  | 6,123       | 1100 60 400 15 1 |
| SDK 650 15   | 500            | 1,50                  | 7,301       | 1100 60 600 15 1 |
| SDK 660 15   | 600            | 1,50                  | 7,654       | 1100 60 600 15 1 |

\*Standard Length(L) 3000mm / on request 2500mm

\*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt &amp; Nuts

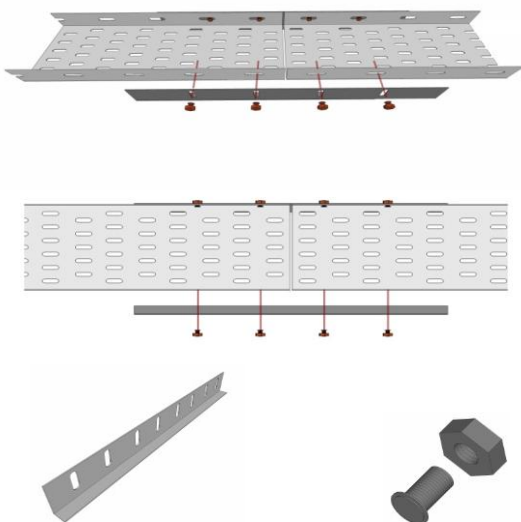
\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**H: 60 Normal Type Non Perforated Cable Tray Load Graph**


| Width, (W) mm | Useful Area cm <sup>2</sup> |
|---------------|-----------------------------|
| 50            | 12,5                        |
| 100           | 25                          |
| 160           | 40                          |
| 200           | 50                          |
| 260           | 65                          |
| 300           | 75                          |
| 400           | 100                         |
| 500           | 125                         |
| 600           | 150                         |

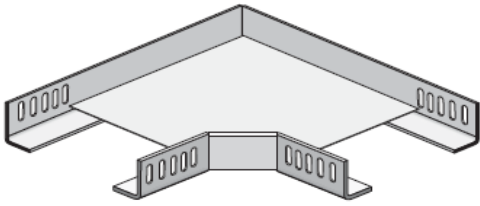
## Straight Connector



| Model Number | Length (mm) | Plate Thick. (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|-------------|-------------------|---------------|------------------|
| KBE 260 10   | 120         | 1                 | 0,071         | 8002 60 120 10 1 |
| BE 260 10    | 240         | 1                 | 0,141         | 8002 60 240 10 1 |
| BE 260 15    | 240         | 1,5               | 0,212         | 8002 60 240 15 1 |


\*Each Connector needs 4 sets of M8 Bolt &amp; Nuts.....

| Model Number | Length (mm) | Diameter, (mm) | Weight kg/set | Order Code (PG)  |
|--------------|-------------|----------------|---------------|------------------|
| CS M8        | 15          | 8              | 0,012         | 9000 08 015 00 1 |

**90° Horizontal Bend**
**60**  
 Side Height


| Order Code | Radius |
|------------|--------|
|------------|--------|

|           |       |
|-----------|-------|
| 1021..... | R:150 |
| 1022..... | R:300 |
| 1023..... | R:450 |
| 1024..... | R:600 |



| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/m | Order Code (PG)  |
|--------------|----------------|-----------------------|-------------|------------------|
| K90 610 10   | 100            | 1,00                  | 0,692       | 1020 60 100 10 1 |
| K90 616 10   | 160            | 1,00                  | 0,913       | 1020 60 160 10 1 |
| K90 620 12   | 200            | 1,20                  | 1,311       | 1020 60 200 12 1 |
| K90 626 12   | 260            | 1,20                  | 1,689       | 1020 60 260 12 1 |
| K90 630 12   | 300            | 1,20                  | 1,980       | 1020 60 300 12 1 |
| K90 640 15   | 400            | 1,50                  | 3,546       | 1020 60 400 15 1 |
| K90 650 15   | 500            | 1,50                  | 4,853       | 1020 60 600 15 1 |
| K90 660 15   | 600            | 1,50                  | 6,396       | 1020 60 600 15 1 |

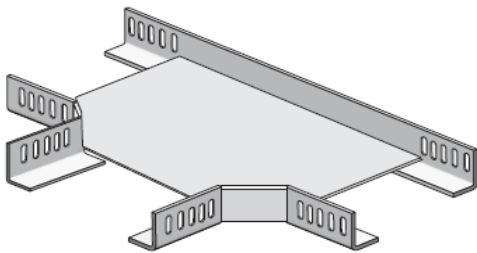
\*No connectors required for fixing to trays

\*Required 8 sets of M8 Bolt &amp; Nuts

\*Please specify A and B dimensions if order unequal bend / different radius


\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AIISI 304 | AIISI 316 |
|----|-----|-------|-----------|-----------|
| +  | +   | +     | +         | +         |

**Tee Horizontal Bend**


| Order Code | Radius |
|------------|--------|
|------------|--------|

|           |       |
|-----------|-------|
| 1031..... | R:150 |
| 1032..... | R:300 |
| 1033..... | R:450 |
| 1034..... | R:600 |



| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| KT 610 10    | 100            | 1,00                  | 0,899         | 1030 60 100 10 1 |
| KT 616 10    | 160            | 1,00                  | 1,099         | 1030 60 160 10 1 |
| KT 620 12    | 200            | 1,20                  | 1,517         | 1030 60 200 12 1 |
| KT 626 12    | 260            | 1,20                  | 1,870         | 1030 60 260 12 1 |
| KT 630 12    | 300            | 1,20                  | 2,144         | 1030 60 300 12 1 |
| KT 640 15    | 400            | 1,50                  | 3,698         | 1030 60 400 15 1 |
| KT 650 15    | 500            | 1,50                  | 4,952         | 1030 60 600 15 1 |
| KT 660 15    | 600            | 1,50                  | 6,442         | 1030 60 600 15 1 |

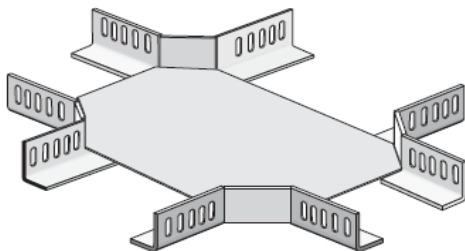
\*No connectors required for fixing to trays

\*Required 12 sets of M8 Bolt &amp; Nuts

\*Please specify A, B and C dimensions if order unequal bend / different radius


\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AIISI 304 | AIISI 316 |
|----|-----|-------|-----------|-----------|
| +  | +   | +     | +         | +         |

**Crossing Horizontal Bend**


| Order Code | Radius |
|------------|--------|
|------------|--------|

|           |       |
|-----------|-------|
| 1041..... | R:150 |
| 1042..... | R:300 |
| 1043..... | R:450 |
| 1044..... | R:600 |



| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| KD 610 10    | 100            | 1,00                  | 1,143         | 1040 60 100 10 1 |
| KD 616 10    | 160            | 1,00                  | 1,322         | 1040 60 160 10 1 |
| KD 620 12    | 200            | 1,20                  | 1,767         | 1040 60 200 12 1 |
| KD 626 12    | 260            | 1,20                  | 2,095         | 1040 60 260 12 1 |
| KD 630 12    | 300            | 1,20                  | 2,351         | 1040 60 300 12 1 |
| KD 640 15    | 400            | 1,50                  | 3,905         | 1040 60 400 15 1 |
| KD 650 15    | 500            | 1,50                  | 5,106         | 1040 60 600 15 1 |
| KD 660 15    | 600            | 1,50                  | 6,542         | 1040 60 600 15 1 |

\*No connectors required for fixing to trays

\*Required 16 sets of M8 Bolt &amp; Nuts

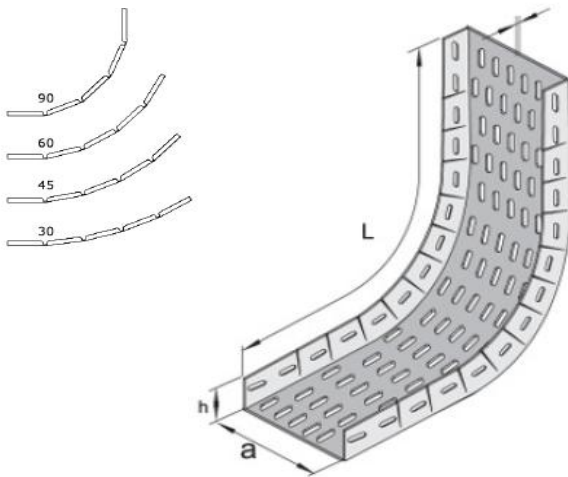
\*Please specify A, B and C dimensions if order unequal bend / different radius

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AIISI 304 | AIISI 316 |
|----|-----|-------|-----------|-----------|
| +  | +   | +     | +         | +         |

**90° Vertical Bend- KIB Series**
**60**

Side Height



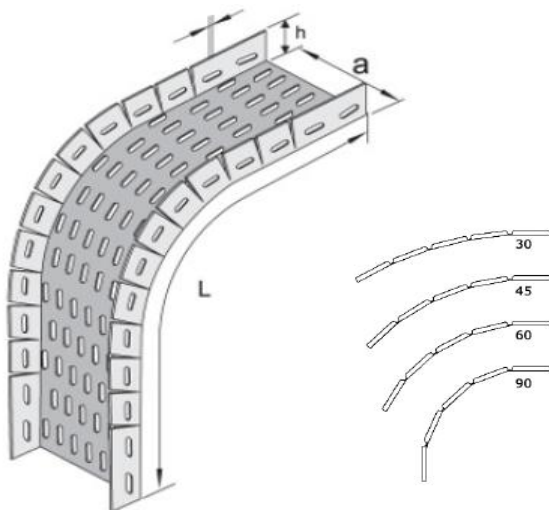
| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| KIB 610 08   | 100            | 0,80                  | 0,898         | 1050 60 100 08 1 |
| KIB 616 08   | 160            | 0,80                  | 1,143         | 1050 60 160 08 1 |
| KIB 620 10   | 200            | 1,00                  | 1,633         | 1050 60 200 10 1 |
| KIB 626 10   | 260            | 1,00                  | 1,939         | 1050 60 260 10 1 |
| KIB 630 10   | 300            | 1,00                  | 2,143         | 1050 60 300 10 1 |
| KIB 640 15   | 400            | 1,50                  | 5,205         | 1050 60 400 15 1 |
| KIB 650 15   | 500            | 1,50                  | 6,205         | 1050 60 600 15 1 |
| KIB 660 15   | 600            | 1,50                  | 7,206         | 1050 60 600 15 1 |

\*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt &amp; Nuts

\*Flexible Vertical bend delivered in plain position and may be used for 30, 60, 90 degrees

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**90° Vertical Bend- KDB Series**


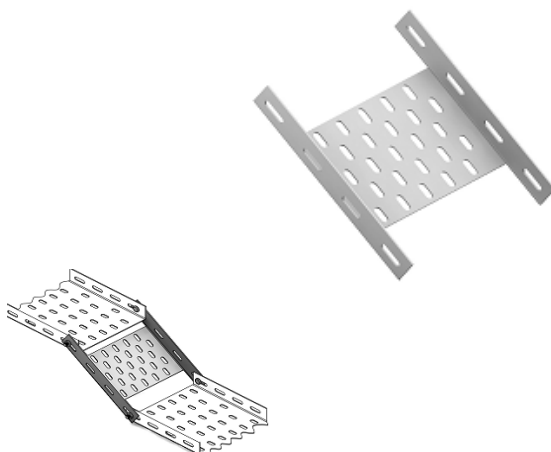
| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| KDB 610 08   | 100            | 0,80                  | 0,898         | 1050 60 100 08 1 |
| KDB 616 08   | 160            | 0,80                  | 1,143         | 1050 60 160 08 1 |
| KDB 620 10   | 200            | 1,00                  | 1,633         | 1050 60 200 10 1 |
| KDB 626 10   | 260            | 1,00                  | 1,939         | 1050 60 260 10 1 |
| KDB 630 10   | 300            | 1,00                  | 2,143         | 1050 60 300 10 1 |
| KDB 640 15   | 400            | 1,50                  | 5,205         | 1050 60 400 15 1 |
| KDB 650 15   | 500            | 1,50                  | 6,205         | 1050 60 600 15 1 |
| KDB 660 15   | 600            | 1,50                  | 7,206         | 1050 60 600 15 1 |

\*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt &amp; Nuts

\*Flexible Vertical bend delivered in plain position and may be used for 30, 60, 90 degrees

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**Modular Adjustable Riser Bend - KMB Series**


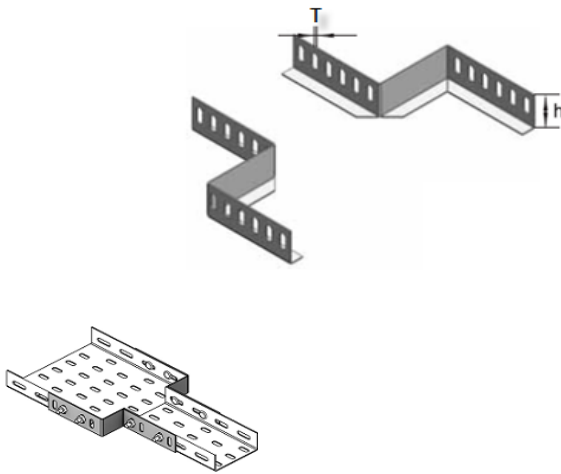
| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| KMB 610 08   | 100            | 0,80                  | 0,199         | 1060 60 100 08 1 |
| KMB 616 08   | 160            | 0,80                  | 0,248         | 1060 60 160 08 1 |
| KMB 620 10   | 200            | 1,00                  | 0,351         | 1060 60 200 10 1 |
| KMB 626 10   | 260            | 1,00                  | 0,413         | 1060 60 260 10 1 |
| KMB 630 10   | 300            | 1,00                  | 0,453         | 1060 60 300 10 1 |
| KMB 640 15   | 400            | 1,50                  | 0,833         | 1060 60 400 15 1 |
| KMB 650 15   | 500            | 1,50                  | 0,986         | 1060 60 600 15 1 |
| KMB 660 15   | 600            | 1,50                  | 1,139         | 1060 60 600 15 1 |

\*No connectors required for fixing to trays

\*Required 4 sets of M8 Bolt &amp; Nuts for each modul

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

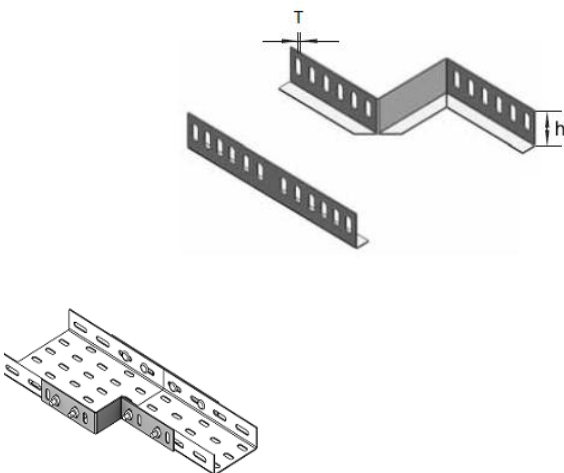
**Middle Reducer Connection (set)**
**60**
**Side Height**


| Model Number | Width (W)<br>(mm) | Plate Thick. (T)<br>(mm) | Weight<br>kg/set | Order Code<br>(PG) |
|--------------|-------------------|--------------------------|------------------|--------------------|
| RO 604 08    | 40                | 1,50                     | 0,382            | 8010 60 040 15 1   |
| RO 605 08    | 50                | 1,50                     | 0,389            | 8010 60 050 15 1   |
| RO 606 08    | 60                | 1,50                     | 0,396            | 8010 60 060 15 1   |
| RO 608 10    | 80                | 1,50                     | 0,410            | 8010 60 080 15 1   |
| RO 610 10    | 100               | 1,50                     | 0,424            | 8010 60 100 15 1   |
| RO 616 10    | 160               | 1,50                     | 0,466            | 8010 60 160 15 1   |
| RO 620 15    | 200               | 1,50                     | 0,495            | 8010 60 200 15 1   |
| RO 630 15    | 300               | 1,50                     | 0,565            | 8010 60 300 15 1   |
| RO 640 15    | 400               | 1,50                     | 0,636            | 8010 60 400 15 1   |
| RO 650 15    | 500               | 1,50                     | 0,707            | 8010 60 600 15 1   |

\*Each Connector Set needs 8 sets of M8 Bolt &amp; Nuts.....

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

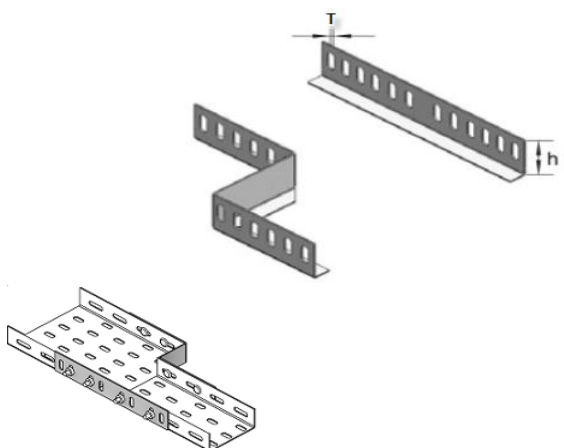
**Left Reducer Connection (set)**


| Model Number | Width (W)<br>(mm) | Plate Thick. (T)<br>(mm) | Weight<br>kg/set | Order Code<br>(PG) |
|--------------|-------------------|--------------------------|------------------|--------------------|
| RL 604 08    | 40                | 1,50                     | 0,382            | 8020 60 040 15 1   |
| RL 605 08    | 50                | 1,50                     | 0,389            | 8020 60 050 15 1   |
| RL 606 08    | 60                | 1,50                     | 0,396            | 8020 60 060 15 1   |
| RL 608 10    | 80                | 1,50                     | 0,410            | 8020 60 080 15 1   |
| RL 610 10    | 100               | 1,50                     | 0,424            | 8020 60 100 15 1   |
| RL 616 10    | 160               | 1,50                     | 0,466            | 8020 60 160 15 1   |
| RL 620 15    | 200               | 1,50                     | 0,495            | 8020 60 200 15 1   |
| RL 630 15    | 300               | 1,50                     | 0,565            | 8020 60 300 15 1   |
| RL 640 15    | 400               | 1,50                     | 0,636            | 8020 60 400 15 1   |
| RL 650 15    | 500               | 1,50                     | 0,707            | 8020 60 600 15 1   |

\*Each Connector Set needs 8 sets of M8 Bolt &amp; Nuts.....

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

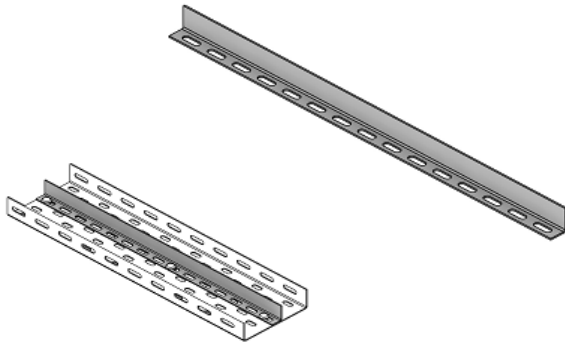
**Right Reducer Connection (set)**


| Model Number | Width (W)<br>(mm) | Plate Thick. (T)<br>(mm) | Weight<br>kg/set | Order Code<br>(PG) |
|--------------|-------------------|--------------------------|------------------|--------------------|
| RG 604 08    | 40                | 1,50                     | 0,382            | 8030 60 040 15 1   |
| RG 605 08    | 50                | 1,50                     | 0,389            | 8030 60 050 15 1   |
| RG 606 08    | 60                | 1,50                     | 0,396            | 8030 60 060 15 1   |
| RG 608 10    | 80                | 1,50                     | 0,410            | 8030 60 080 15 1   |
| RG 610 10    | 100               | 1,50                     | 0,424            | 8030 60 100 15 1   |
| RG 616 10    | 160               | 1,50                     | 0,466            | 8030 60 160 15 1   |
| RG 620 15    | 200               | 1,50                     | 0,495            | 8030 60 200 15 1   |
| RG 630 15    | 300               | 1,50                     | 0,565            | 8030 60 300 15 1   |
| RG 640 15    | 400               | 1,50                     | 0,636            | 8030 60 400 15 1   |
| RG 650 15    | 500               | 1,50                     | 0,707            | 8030 60 600 15 1   |

\*Each Connector Set needs 8 sets of M8 Bolt &amp; Nuts.....

\*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

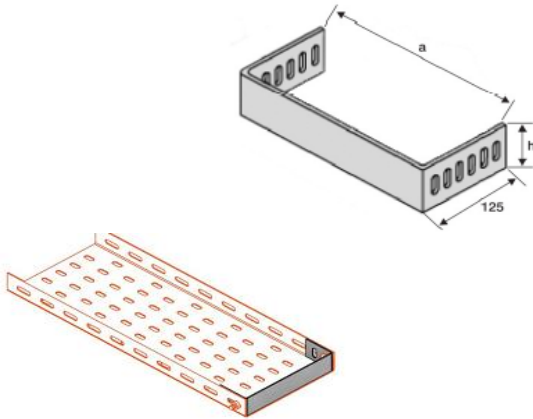
| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**Barrier Strip**
**60**  
 Side Height


| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/m | Order Code (PG)  |
|--------------|----------------|-----------------------|-------------|------------------|
| SEP 160 08   | 15             | 0,80                  | 0,471       | 8111 60 000 08 1 |
| SEP 160 09   | 15             | 0,90                  | 0,530       | 8111 60 000 09 1 |
| SEP 160 10   | 15             | 1,00                  | 0,589       | 8111 60 000 10 1 |
| SEP 160 12   | 15             | 1,20                  | 0,707       | 8111 60 000 12 1 |
| SEP 160 15   | 15             | 1,50                  | 0,883       | 8111 60 000 15 1 |
| SEP 160 20   | 15             | 2,00                  | 1,178       | 8111 60 000 20 1 |

\*Standard Length 3000mm / on request 2500mm  
 \*Each Separator needs M8x15mm Bolt & Nuts set for fixing to trays  
 \*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

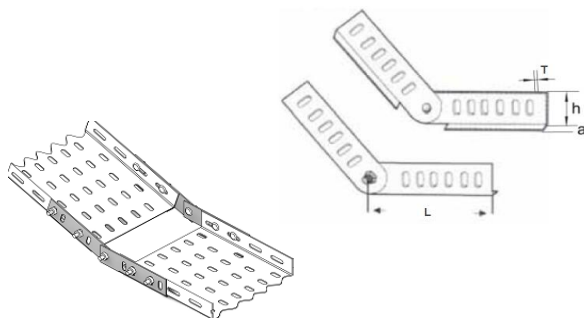
| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**Stop End**


| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| SON 610 08   | 100            | 1,50                  | 0,247         | 8210 60 100 15 1 |
| SON 616 08   | 160            | 1,50                  | 0,290         | 8210 60 160 15 1 |
| SON 620 10   | 200            | 1,50                  | 0,318         | 8210 60 200 15 1 |
| SON 626 10   | 260            | 1,50                  | 0,360         | 8210 60 260 15 1 |
| SON 630 10   | 300            | 2,00                  | 0,518         | 8210 60 300 20 1 |
| SON 640 15   | 400            | 2,00                  | 0,612         | 8210 60 400 20 1 |
| SON 650 15   | 500            | 2,00                  | 0,707         | 8210 60 600 20 1 |
| SON 660 15   | 600            | 2,00                  | 0,801         | 8210 60 600 20 1 |

\*Each Stop End needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray  
 \*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

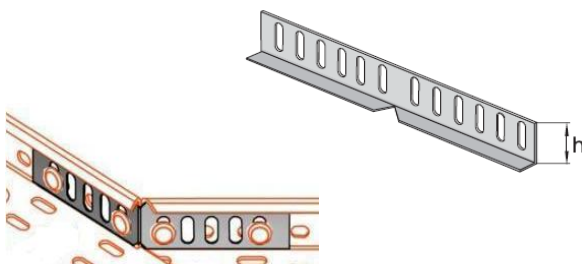
| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**Adjustable Vertical Connector**


| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| BDD 260 08   | 300            | 0,80                  | 0,141         | 8322 60 300 08 1 |
| BDD 260 10   | 300            | 1,00                  | 0,177         | 8322 60 300 10 1 |
| BDD 260 15   | 300            | 1,50                  | 0,265         | 8322 60 300 15 1 |

\*Each Adjustable Connector needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray  
 \*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |

**Adjustable Horizontal Connector- BY Series**


| Model Number | Width (W) (mm) | Plate Thick. (T) (mm) | Weight kg/pcs | Order Code (PG)  |
|--------------|----------------|-----------------------|---------------|------------------|
| BYD 160 08   | 300            | 0,80                  | 0,141         | 8311 60 300 08 1 |
| BYD 160 10   | 300            | 1,00                  | 0,177         | 8311 60 300 10 1 |
| BYD 160 15   | 300            | 1,50                  | 0,265         | 8311 60 300 15 1 |

\*Each Adjustable Connector needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray  
 \*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

| PG | HDG | EPOXY | AISI 304 | AISI 316 |
|----|-----|-------|----------|----------|
| +  | +   | +     | +        | +        |