


Schema Tehnica Parqwood XXL



1. Tratament de suprafata in mai multe straturi cu lac Ultimtec
2. Strat superior din lemn de stejar 0,6 mm
3. Miez HDF de mare densitate (875Kg/m³)
4. Sistem de imbinare BestLoc X-Treme
5. Strat support din furnir (molid)

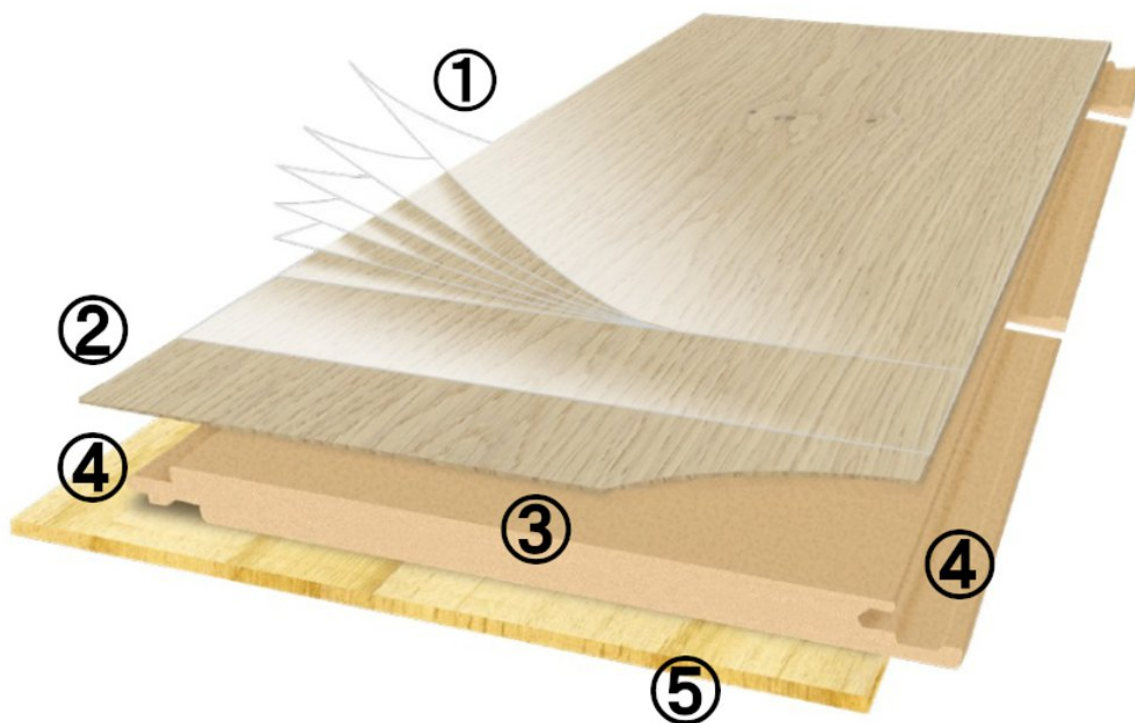

LAMINAT



LAMINAT FURNIRUIT

