


TEU RAPID PE FILET EXTERIOR

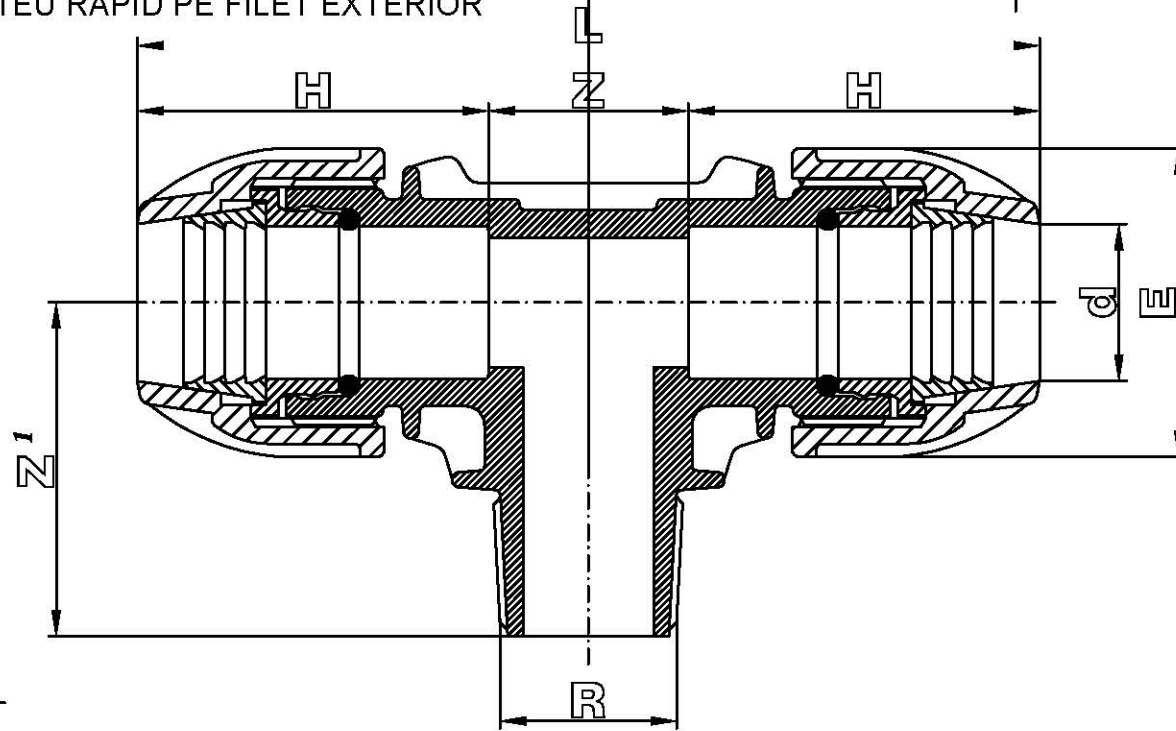

The FILBO connecting joint is designed and manufactured in according to the international standard norms:

- ISO 3458
- ISO 3459
- ISO 3501
- ISO 3503
- ISO 14236
- DIN 8076-3
- KIWA BRLK 534-01
- UNI 9561
- UNI 9562


The connecting parts of the body with the PE pipes are designed in according to the international standard norms:

- ISO DIS 3607
- DIN 8072
- DIN 8074
- UNI 7611
- UNI 7990

Male and female threaded adaptors are designed in according to the international standard norms:

- ISO 7
- UNI ISO 7-1
- BS 21

dxR	Z _{min.}	H		L		Z' _{min.}	E		g
		Toller.		Toller.			Toller.		
20x1/2"	28	58	+3mm	144	+3mm	51	47	+0.30	65
20x3/4"	28	58	+3mm	144	+3mm	51	47	+0.30	65
25x3/4"	32	67	+3mm	166	+3mm	55	54	+0.30	65
25x1"	32	67	+3mm	166	+3mm	55	54	+0.30	65
32x1"	40	77	+3mm	194	+3mm	65	66	+0.30	65
32x1 1/4"	40	77	+3mm	194	+3mm	65	66	+0.30	65
40x1 1/4"	54	96	+5mm	246	+5mm	76	83	+0.50	65
40x1 1/2"	54	96	+5mm	246	+5mm	76	83	+0.50	65
50x1 1/2"	66	110	+5mm	286	+5mm	85	98	+0.50	65
50x2"	66	110	+5mm	286	+5mm	88	98	+0.50	65
63x2"	76	124	+5mm	324	+5mm	96	116	+0.50	65

 <p>6, Tsar Ivan Shishman Str. Varna - Bulgaria</p>		DENOMINAZIONE Male Tee Data Sheet.	
		TEU RAPID PE FE	
Designer		Raw Material	Drawing N°
SCALA //	Date 05.06.2007	Injection Machine	
			DSH 0011