

28.04.22


Technical Data Sheet

PTFE Thread Seal Tape

Honest General Trading SRL
 CIF: RO 6615609
 Reg.Com: J40/25279/1994
 Head Office: Agricultori 121 street,
 Sector 3, Bucharest
 www.honest.ro



HGT code	Name	Tape Length[m]	Tape Width[mm]	Thickness [mm]	Density (g/cm ³)	d[mm]	D[mm]	L[mm]	G[kg]	EAN Code	Cod EAN	Packing	Description	
									N.W.*	s10	Buc		Main Material	PTFE
679675	Banda Teflon 1109	10	12	0.075	0.25	24	52	18	0.008	5949094034759	5949094035398	1 / 10 / 100 xs10	Housing material	PP
679676		10	12	0.075	0.4	24	52	18	0.008	5949094034766	5949094035404	1 / 10 / 100 xs10	Main Color	White
679677		10	12	0.1	0.4	24	52	18	0.008	5949094034773	5949094035411	1 / 10 / 100 xs10	Working PH	0-14
679678		40	19	0.075	0.25	25	75	25	0.029	5949094034780	5949094035428	1 / - / 25 xs10	Working temperature	0°C - 285 °C
679679		40	19	0.075	0.4	25	75	25	0.034	5949094034797	5949094035435	1 / - / 25 xs10	Working pressure	max. 20 bar
679680		15	19	0.2	0.3	25	75	25	0.034	5949094034803	5949094035442	1 / - / 25 xs10	Resistant to all aggressive solvents and chemical compounds, except high temperature gaseous fluoride, chlorine trifluoride, molten alkaline metals or in solution.	
679681		15	19	0.2	0.35	25	75	25	0.034	5949094034810	5949094035459	1 / - / 25 xs10		
			Properties		Odorless, tasteless, insoluble									
			Used for threads with an outer diameter of up to 4 inches.											
			10 year warranty											
			Certificates and agreeme		No need									
			Individual packing Type		PP box with label									
- N.W.*=net weight.														

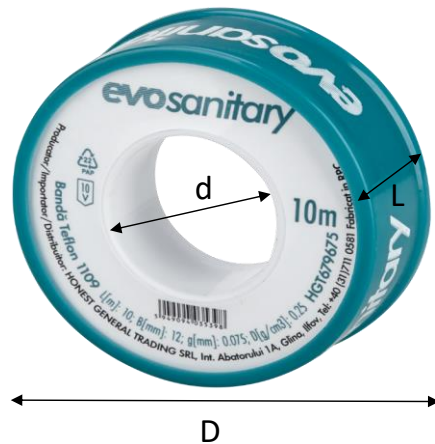



Housing color must be
Turquoise PANTONE 3155 C

White