
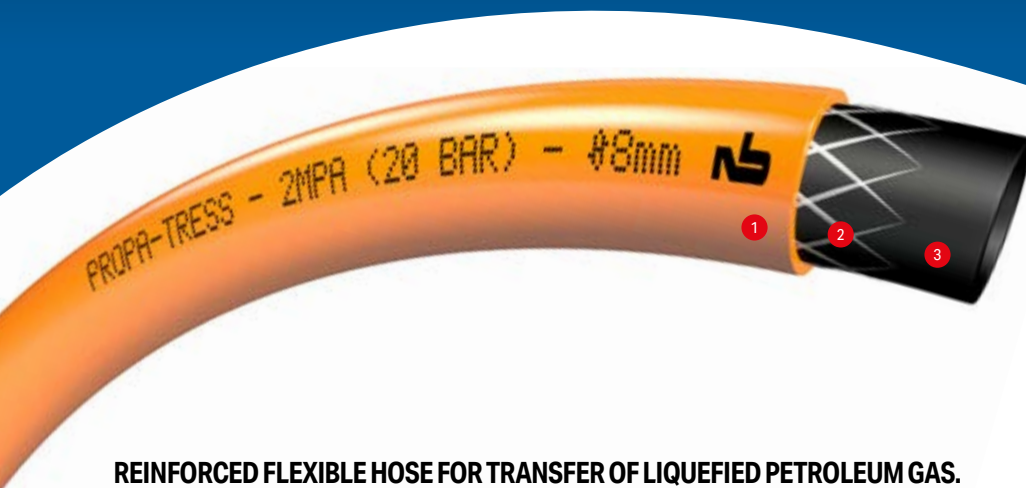


# PROPA-TRESS®



- 1 Flexible orange PVC coating
- 2 Textile reinforcement
- 3 Flexible black PVC core

## REINFORCED FLEXIBLE HOSE FOR TRANSFER OF LIQUEFIED PETROLEUM GAS.

Three layer design, in flexible PVC, with polyester fibre reinforcement.

### APPLICATIONS

Welding and associated techniques: Propane supply to blow torches, heated paint booths, heating: infra red heaters for livestock rearing buildings heating, gas transfer (air or industrial gases)

### SECTORS OF ACTIVITY

Industry, agriculture, consumer market welding and camping equipment

### MARKING

PROPA-TRESS - 2 MPA (20bar) - Ø inn - [year of manufacturing]\*- [Batch number]

\*Year of production written in the marking is not a date of substitution.

### ADVANTAGES

The qualities of the PVC compound provide the PROPA-TRESS® hose with flexibility, light weight, excellent resistance to ageing, and also render it impermeable to LPG.

This hose withstands repeated bending and flattening.

### CONNECTORS

Barbed or serrated connectors and worm drive or 'O' type clamps. Crimping is possible with non damaging connectors.

### CHEMICAL RESISTANCE

See table pages 106 to 109 column A for outer layer, column B for inner layer.

|     | $\pm$  |    | $\pm$  |      |     |     |     |    |                          |
|-----|--------|----|--------|------|-----|-----|-----|----|--------------------------|
| mm  | mm     | mm | mm     | mm   | g/m | bar | bar | mm |                          |
| 6.3 | +/-0.4 | 12 | +/-0.4 | 2.85 | 98  | 80  | 20  | 44 | Orange<br>25 m<br>051377 |
| 8   | +/-0.5 | 14 | +/-0.5 | 3    | 124 | 80  | 20  | 56 | 051388                   |
| 9   | +/-0.5 | 16 | +/-0.5 | 3.5  | 164 | 80  | 20  | 63 | 051390                   |