


TEU RAPID PE FILET EXTERIOR

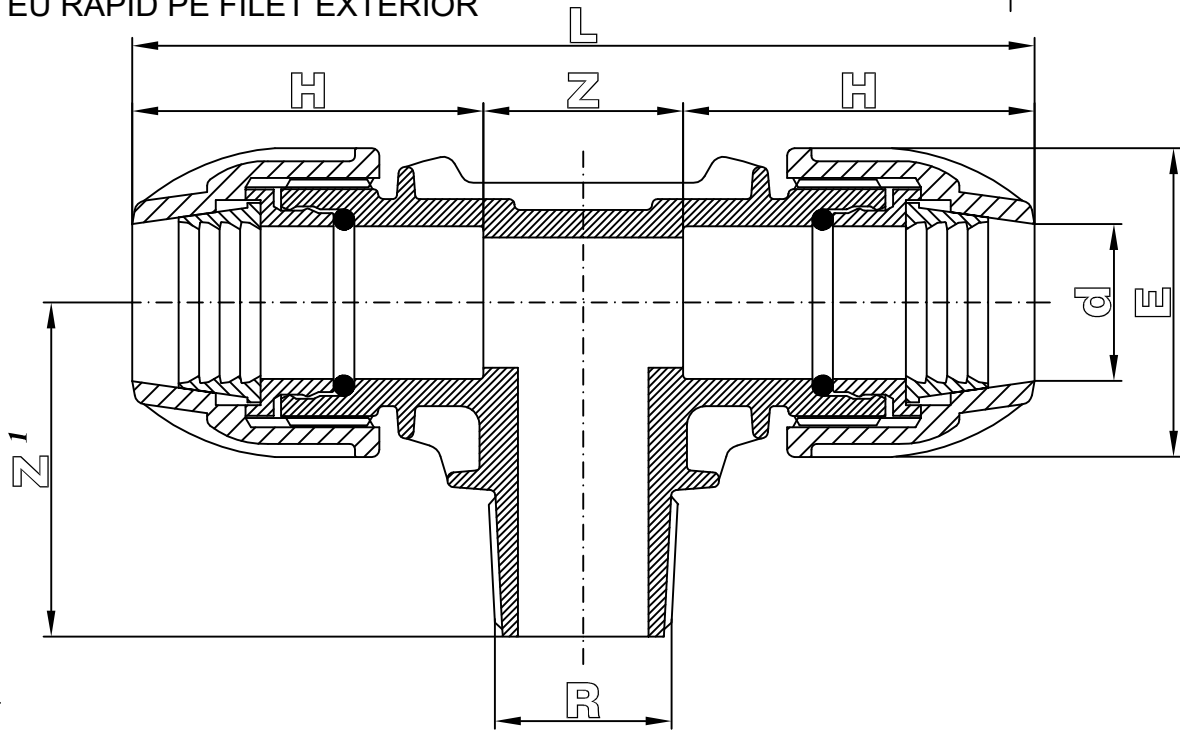

The FILBO connecting joint is designed and manufactured in according to the international standard norms:

- ISO 3458
- ISO 3459
- ISO 3501
- ISO 3503
- ISO 14236
- DIN 8076-3
- KIWA BRLK 534-01
- UNI 9561
- UNI 9562


The connecting parts of the body with the PE pipes are designed in according to the international standard norms:

- ISO DIS 3607
- DIN 8072
- DIN 8074
- UNI 7611
- UNI 7990

Male and female threaded adaptors are designed in according to the international standard norms:

- ISO 7
- UNI ISO 7-1
- BS 21

| dxR | Z _{min.} | H | Toller. | L | Toller. | Z' _{min.} | E | Toller. | g |
|----------|-------------------|-----|---------|-----|---------|--------------------|-----|---------|----|
| 20x1/2" | 28 | 58 | +3mm | 144 | +3mm | 51 | 47 | +0.30 | 65 |
| 20x3/4" | 28 | 58 | +3mm | 144 | +3mm | 51 | 47 | +0.30 | 65 |
| 25x3/4" | 32 | 67 | +3mm | 166 | +3mm | 55 | 54 | +0.30 | 65 |
| 25x1" | 32 | 67 | +3mm | 166 | +3mm | 55 | 54 | +0.30 | 65 |
| 32x1" | 40 | 77 | +3mm | 194 | +3mm | 65 | 66 | +0.30 | 65 |
| 32x1"1/4 | 40 | 77 | +3mm | 194 | +3mm | 65 | 66 | +0.30 | 65 |
| 40x1"1/4 | 54 | 96 | +5mm | 246 | +5mm | 76 | 83 | +0.50 | 65 |
| 40x1"1/2 | 54 | 96 | +5mm | 246 | +5mm | 76 | 83 | +0.50 | 65 |
| 50x1"1/2 | 66 | 110 | +5mm | 286 | +5mm | 85 | 98 | +0.50 | 65 |
| 50x2" | 66 | 110 | +5mm | 286 | +5mm | 88 | 98 | +0.50 | 65 |
| 63x2" | 76 | 124 | +5mm | 324 | +5mm | 96 | 116 | +0.50 | 65 |

| | | | |
|---|--------------------|---------------------------------------|------------|
|  6, Tsar Ivan Shishman Str. Varna - Bulgaria | | DENOMINAZIONE Male Tee Data Sheet. | |
| | | TEU RAPID PE FE | |
| Designer | | Raw Material | Drawing N* |
| SCALA // | Date 05.06.2007 | Injection Machine | |
| | | | DSH 0011 |