


MUFA RAPIDA PE

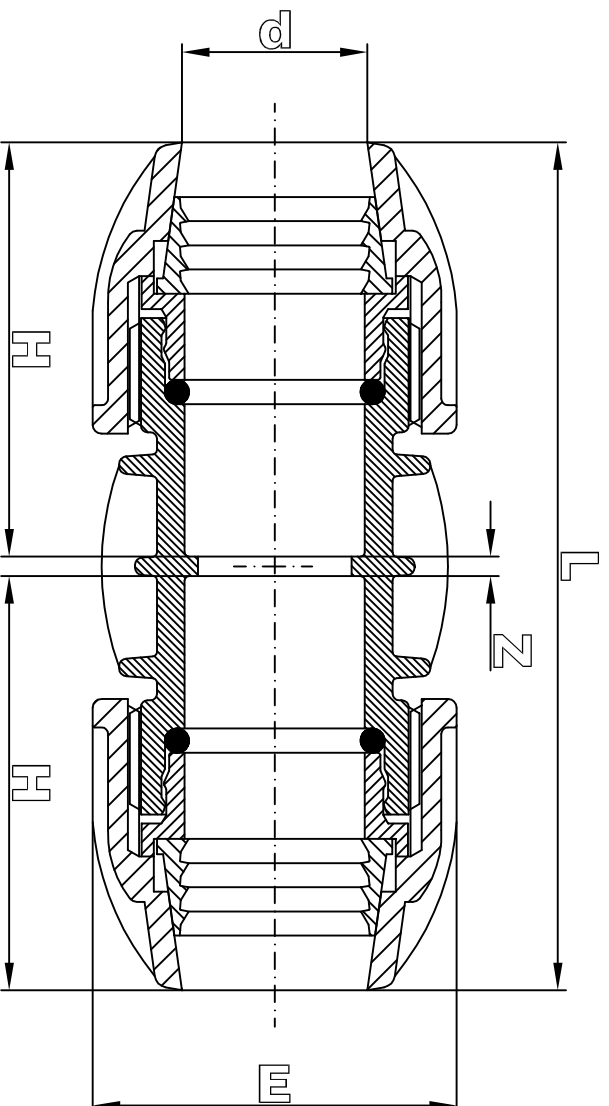

d	Z min.	H	L		E		S	
			Tolerance	Tolerance	Tolerance	Tolerance		
20	3	58	+3 mm	119	+3 mm	47	+0.3 mm	65
25	3	67	+3 mm	137	+3 mm	54	+0.3 mm	95
32	3	77	+3 mm	157	+3 mm	66	+0.3 mm	170
40	4	96	+5 mm	196	+5 mm	83	+0.5 mm	350
50	5	110	+5 mm	225	+5 mm	98	+0.5 mm	530
63	6	124	+5 mm	254	+5 mm	116	+0.5 mm	790
75								
90								
110								

The FILBO connecting joint is designed and manufactured in according to the international standard norms:


ISO 3458
 ISO 3459
 ISO 3501
 ISO 3503
 ISO 14236
 DIN 8076-3
 KIWA BRLK 534-01
 UNI 9561
 UNI 9562

The connecting parts of the body with the PE pipes are designed in according to the international standard norms:

ISO DIS 3607
 DIN 8072
 DIN 8074
 UNI 7611
 UNI 7990

Male and female threaded adaptors are designed in according to the international standard norms:

ISO 7
 UNISO 7-1
 BS 21

Designer				DENOMINAZIONE	
6, Tsar Ivan Shishman Str. Varna – Bulgaria		Raw Material		Coupling Data Sheet: FISA MUFA RAPIDA PE	
SCALA	Date	Injection Machine		Drawing N°	
//	05.06.2007			DSH 0001	