

Corocrat

Eave mesh-faced closer


The eave mesh-faced closer is made of high quality PVC. It protects the roof space against access of birds, rodents, insects as well as blown-in leaves and twigs. It also protects thermal insulation from damage, and ensures the appropriate roof ventilation.

Advantages

- ✓ increased ventilation space
- ✓ protects against insects and contamination
- ✓ resistant to UV-rays and ageing processes

Application

- ✓ ventilates and protects the open eave area, especially where flat tiles are used

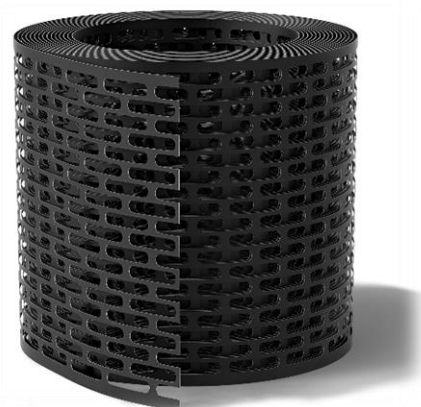

Characteristics

Material	PCV
Colour	black, brown, brick red
Length	5000 mm
Width	80 / 100 mm
Vicat softening temperature	≥ 75°C
Tensile strength	≥ 27 MPa
Relative elongation at break,	≥ 6,0 %
Dimensional and shape stability at temp. over a period of 3 h, change in dimensions	≤ 1,0 no defects, no shape changes

Installation

1. Place the ventilation grille on the support batten, and then fix it.
2. Install the next batten on which the tiles are mounted so that the tile enters the gutter between 1/4 and 1/2 of its width.

The product has passed a positive assessment of its performance for the intended use: ventilation and roofing. Confirmation document: National Technical Assessment No. ITB-KOT-2020/1462 edition 1.

Storage

The product should be stored in dry and covered places, protected against deformations. Transport it by covered means of transport, adequately protecting against damage.

Packaging

Quantity per box (pcs.):	20
Quantity on a pallet (pcs):	840

The information contained in this data sheet, particularly recommendations regarding the manner and conditions of application as well as the scope of use of the product, have been developed based on our experience, our best knowledge and in good faith. Apart from the information given in this data sheet, health and safety regulations, etc. must be observed. This technical data sheet supersedes all previous versions applicable to this product.