


TEU RAPID PE FILET INTERIOR

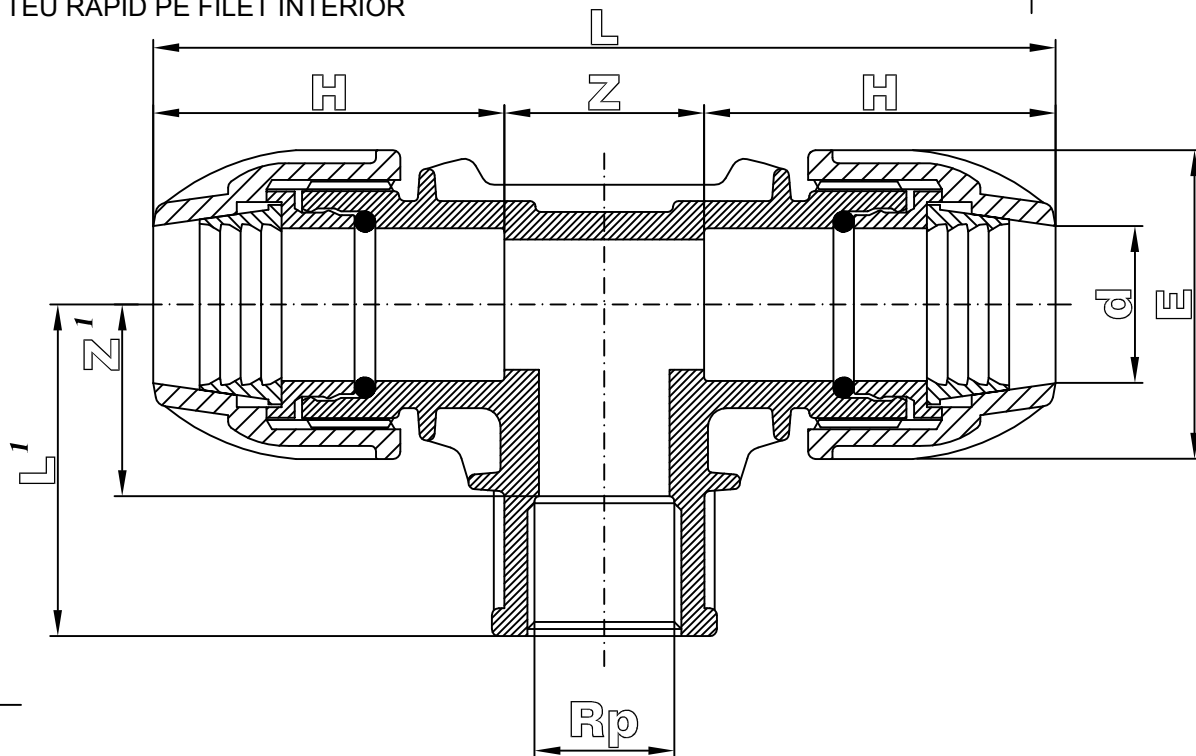

The FILBO connecting joint is designed and manufactured in according to the international standard norms:

- ISO 3458
- ISO 3459
- ISO 3501
- ISO 3503
- ISO 14236
- DIN 8076-3
- KIWA BRLK 534-01
- UNI 9561
- UNI 9562

The connecting parts of the body with the PE pipes are designed in according to the international standard norms:


- ISO DIS 3607
- DIN 8072
- DIN 8074
- UNI 7611
- UNI 7990

Male and female threaded adaptors are designed in according to the international standard norms:

- ISO 7
- UNI ISO 7-1
- BS 21

dxRp	Z min.	H	Toller.	L	Toller.	Z' min.	L'	Toller.	E	Toller.	g
20x1/2"	28	58	+3 mm	144	+3 mm	27	50	+3 mm	47	+0.30	80
20x3/4"	28	58	+3 mm	144	+3 mm	31	54	+3 mm	47	+0.30	85
25x1/2"	32	67	+3 mm	166	+3 mm	34	57	+3 mm	54	+0.30	115
25x3/4"	32	67	+3 mm	166	+3 mm	34	57	+3 mm	54	+0.30	120
25x1"	32	67	+3 mm	166	+3 mm	36	59	+3 mm	54	+0.30	130
32x3/4"	40	77	+3 mm	194	+3 mm	44	67	+3 mm	66	+0.30	200
32x1"	40	77	+3 mm	194	+3 mm	41	64	+3 mm	66	+0.30	210
* 32x1"1/4	40	77	+3 mm	194	+3 mm	41	65	+3 mm	66	+0.30	230
40x1"	54	96	+5 mm	246	+5 mm	52	76	+5 mm	83	+0.50	440
* 40x1"1/4	54	96	+5 mm	246	+5 mm	49	73	+5 mm	83	+0.50	460
* 40x1"1/2	54	96	+5 mm	246	+5 mm	47	72	+5 mm	83	+0.50	470
* 50x1"1/2	66	110	+5 mm	286	+5 mm	59	88	+5 mm	98	+0.50	710
* 50x2"	66	110	+5 mm	286	+5 mm	58	83	+5 mm	98	+0.50	750
* 63x2"	76	124	+5 mm	324	+5 mm	65	95	+5 mm	116	+0.50	1130

\* With AISI 430 Stainless Steel reinforcing ring.

 6, Tsar Ivan Shishman Str. Varna - Bulgaria		DENOMINAZIONE Female Tee Data Sheet.	
		FISA TEU RAPID FI	
Designer		Raw Material	Drawing N°
SCALA //	Date 05.06.2007	Injection Machine	
			DSH 0010