


Perforated Cable Trays - SPK Series

40
Side Height


Standart Perfore Kablo Kanali

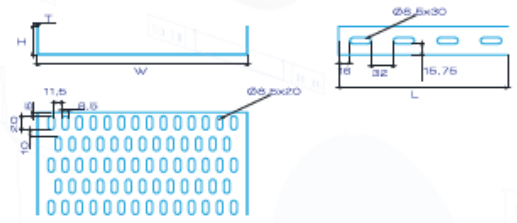

Cable Trays
Kablo Kanallı
H = 40

Model	W Width (W) (mm)	pregalvanised steel			hot dip galvanized finish		
		T Thickness (T) (mm)	Weight kg/m	"Order Code (PG)"	T Thickness (T) (mm)	Weight kg/m	"Order Code (HDG)"
SPK 405	50	0,80	0,82	1000 40 050 08 1	1,00	1,02	1000 40 050 10 2
SPK 410	100	0,80	1,13	1000 40 100 08 1	1,00	1,41	1000 40 100 10 2
SPK 415	150	1,00	1,81	1000 40 150 10 1	1,20	2,17	1000 40 150 12 2
SPK 420	200	1,00	2,20	1000 40 200 10 1	1,20	2,84	1000 40 200 12 2
SPK 425	250	1,00	2,59	1000 40 250 10 1	1,20	3,11	1000 40 250 12 2
SPK 430	300	1,20	3,58	1000 40 300 12 1	1,50	4,47	1000 40 300 15 2
SPK 440	400	1,20	4,52	1000 40 400 12 1	1,50	5,85	1000 40 400 15 2
SPK 450	500	1,50	6,89	1000 40 500 15 1	2,00	8,11	1000 40 500 20 2
SPK 460	600	1,50	8,01	1000 40 600 15 1	2,00	10,68	1000 40 600 20 2

H: 40 - Perforated Cable Tray Load Graph

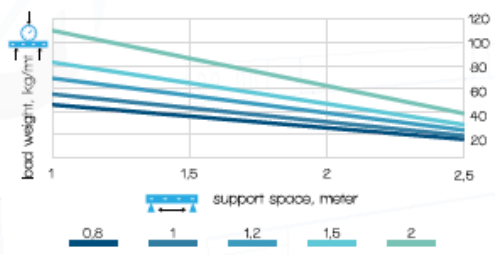

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety co-efficient: 1.7

Recommended support distance : 1.5mt


Material & Finish Options:

- PG : pregalvanised steel EN 10142
- HDG : hot dip galvanized EN ISO 1481
- SS : stainless steel AISI 304
- AL : aluminum




Non Perforated Cable Trays - SDK Series

Standart Deliksiz Kablo Kanalı

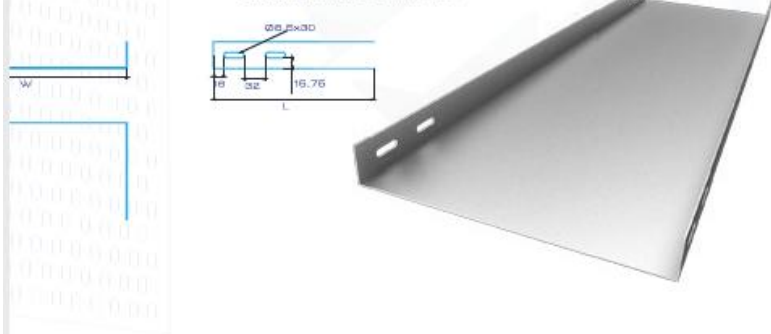

Model	Width (W) (mm)	pregalvanized steel			hot dip galvanized finish		
		Thickness (T) (mm)	Weight (kg/m)	Order Code (PG)	Thickness (T) (mm)	Weight (kg/m)	Order Code (HDG)
SDK 405	50	0,80	0,82	1100 40 050 08 1	1,00	1,02	1100 40 050 10 2
SDK 410	100	0,80	1,13	1100 40 100 08 1	1,00	1,41	1100 40 100 10 2
SDK 415	150	1,00	1,81	1100 40 150 10 1	1,20	2,17	1100 40 150 12 2
SDK 420	200	1,00	2,20	1100 40 200 10 1	1,20	2,64	1100 40 200 12 2
SDK 425	250	1,00	2,59	1100 40 250 10 1	1,20	3,11	1100 40 250 12 2
SDK 430	300	1,20	3,58	1100 40 300 12 1	1,50	4,47	1100 40 300 15 2
SDK 440	400	1,20	4,52	1100 40 400 12 1	1,50	5,65	1100 40 400 15 2
SDK 450	500	1,50	6,93	1100 40 500 15 1	2,00	9,11	1100 40 500 20 2
SDK 460	600	1,50	8,01	1100 40 600 15 1	2,00	10,68	1100 40 600 20 2

40 - Non Perforated Cable Tray Load Graph

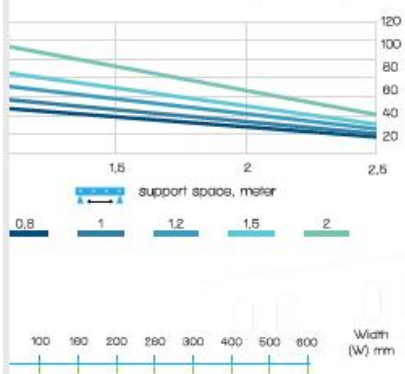

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety co-efficient: 1.7

Recommended support distance : 1.5mt


Material & Finish Options:

- PG : pregalvanized steel EN 10142
- HDG : hot dip galvanized EN ISO 1461
- SS : stainless steel AISI 304

Straight Connector and Fixing Element

Birleşime ve Bağlantı Elemanları

40
Side Height

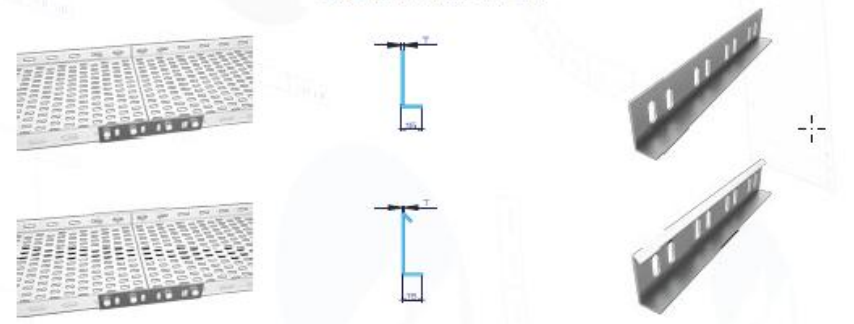

Model Number	Length (L) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KB2E 240	130	1,20	0,07	8002 40 130 12 1	8002 40 130 12 2
BE 240	210	1,50	0,14	8002 40 210 15 1	8002 40 210 15 2
KB2E 340	130	1,20	0,08	8003 40 130 12 1	8003 40 130 12 2
BE 340	210	1,50	0,16	8003 40 210 15 1	8003 40 210 15 2

Material & Finish Options:
PG HDG SS




Model Number	Width (W) (mm)	In Pack set	Weight (kg/pcs)	Order Code (EG)	Order Code (DACROMET)
CS M8	M8x15	200	0,012	8000 08 015 00 7	8000 08 015 00 2

Adjustable Horizontal Connector

Yatay Seviye Dışgıtirme Eki




Model Number	Length (L) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
BYD 140 10	250	1,00	0,108	8311 40 250 10 1	
BYD 140 12	250	1,20	0,130	8311 40 250 12 1	8311 40 250 12 2
BYD 140 15	250	1,50	0,162	8311 40 250 15 1	8311 40 250 15 2



Perforated Cable Trays - SPK Series

50
Side Height


Standart Perfore Kablo Kanallı

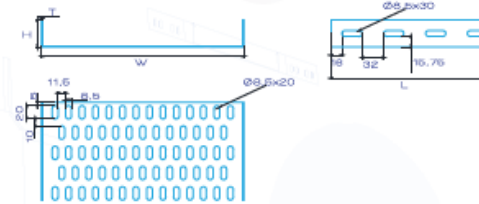

Cable Trays
Kablo Kanallı
H = 50

Model	W Width (W) (mm)	pregalvanised steel			hot dip galvanised finish		
		T Thickness (T) (mm)	Weight kg/m	"Order Code (PG)"	T Thickness (T) (mm)	Weight kg/m	"Order Code (HDG)"
SPK 505	50	0,80	0,94	1000 50 050 08 1	1,00	1,18	1000 50 050 10 2
SPK 510	100	0,80	1,28	1000 50 100 08 1	1,00	1,57	1000 50 100 10 2
SPK 515	150	1,00	1,98	1000 50 150 10 1	1,20	2,38	1000 50 150 12 2
SPK 520	200	1,00	2,98	1000 50 200 10 1	1,20	2,88	1000 50 200 12 2
SPK 525	250	1,00	2,75	1000 50 250 10 1	1,20	3,30	1000 50 250 12 2
SPK 530	300	1,20	3,77	1000 50 300 12 1	1,50	4,71	1000 50 300 15 2
SPK 540	400	1,20	4,71	1000 50 400 12 1	1,50	5,89	1000 50 400 15 2
SPK 550	500	1,50	7,07	1000 50 500 15 1	2,00	8,42	1000 50 500 20 2
SPK 560	600	1,50	8,24	1000 50 600 15 1	2,00	10,99	1000 50 600 20 2

H: 50 - Perforated Cable Tray Load Graph

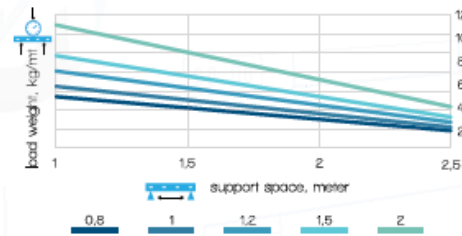

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety co-efficient: 1.7

Recommended support distance : 1.5mt

Material & Finish Options:


- PG : pregalvanised steel EN 10142
- HDG : hot dip galvanised EN ISO 1461
- SS : stainless steel AISI 304
- Al : aluminum



le Trays

Non Perforated Cable Trays - SDK Series

Standart Deliksiz Kablo Kanalı



metakson

metakson

Cable Trays

Straight Connector and Fixing Element

50
Side Height

Birleştirme ve Bağlantı Elemanları



Model	W Width (W) (mm)	pregalvanized steel			hot dip galvanized finish		
		T Thickness (T) (mm)	Weight kg/m	Order Code (PG)	T Thickness (T) (mm)	Weight kg/m	Order Code (HDG)
SDK 808	50	0,80	0,94	1100 50 080 08 1	1,00	1,18	1100 50 080 10 2
SDK 810	100	0,80	1,28	1100 50 100 08 1	1,00	1,57	1100 50 100 10 2
SDK 815	150	1,00	1,98	1100 50 150 10 1	1,20	2,38	1100 50 150 12 2
SDK 820	200	1,00	2,98	1100 50 200 10 1	1,20	2,89	1100 50 200 12 2
SDK 825	250	1,00	2,75	1100 50 250 10 1	1,20	3,30	1100 50 250 12 2
SDK 830	300	1,20	3,77	1100 50 300 12 1	1,50	4,71	1100 50 300 15 2
SDK 840	400	1,20	4,71	1100 50 400 12 1	1,50	5,89	1100 50 400 15 2
SDK 850	500	1,50	7,07	1100 50 500 15 1	2,00	8,42	1100 50 500 20 2
SDK 860	600	1,50	8,24	1100 50 600 15 1	2,00	10,99	1100 50 600 20 2

Material & Finish Options:
PG HDG SS

Model Number	L Length (L) (mm)	T Plate Thick. (T) (mm)	Weight kg/pos	Order Code (PG)	Order Code (HDG)
KBE 250	130	1,20	0,08	8002 50 130 12 1	8002 50 130 12 2
BE 250	210	1,50	0,16	8002 50 210 15 1	8002 50 210 15 2
KBE 350	130	1,20	0,08	8003 50 130 12 1	8003 50 130 12 2
BE 350	210	1,50	0,16	8003 50 210 15 1	8003 50 210 15 2



Model Number	Width (W) (mm)	In Pack set	Weight kg/pos	Order Code (EG)	Order Code (DACROMET)
CS MB	M6x15	200	0,012	8000 08 015 00 7	8000 08 015 00 2


Adjustable Horizontal Connector

Yatay Seviye Değiştirme Eki



Model Number	L Length (L) (mm)	T Plate Thick. (T) (mm)	Weight kg/pos	Order Code (PG)	Order Code (HDG)
BYD 150 10	250	1,00	0,128	8311 50 250 10 1	
BYD 150 12	250	1,20	0,153	8311 50 250 12 1	8311 50 250 12 2
BYD 150 15	250	1,50	0,191	8311 50 250 15 1	8311 50 250 15 2

50 - Non Perforated Cable Tray Load Graph

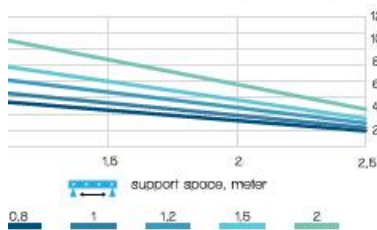

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7


Safety co-efficient: 1.7

Recommended support distance : 1,5m

Material & Finish Options:

- PG : pregalvanized steel EN 10142
- HDG : hot dip galvanized EN ISO 1461
- SS : stainless steel AISI 304




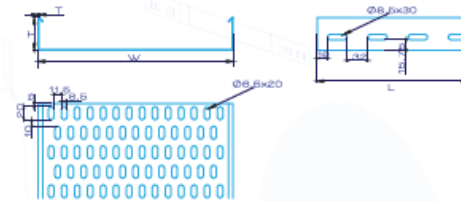

Cable Trays
Kablo Kanallı
H = 35
With Return Flanges
Ağır Hizmet Tipi

Model	W Width (mm)	pregalvanized steel			hot dip galvanized finish		
		T Thickness (T) (mm)	Weight kg/m	"Order Code (PG)"	T Thickness (T) (mm)	Weight kg/m	"Order Code (HDG)"
APK 305	80	0,80	0,88	1200 35 080 08 1	1,00	1,10	1200 35 080 10 2
APK 310	100	0,80	1,18	1200 35 100 08 1	1,00	1,48	1200 35 100 10 2
APK 315	150	1,00	1,88	1200 35 150 10 1	1,20	2,28	1200 35 150 12 2
APK 320	200	1,00	2,28	1200 35 200 10 1	1,20	2,78	1200 35 200 12 2
APK 325	250	1,00	2,67	1200 35 250 10 1	1,20	3,20	1200 35 250 12 2
APK 330	300	1,20	3,67	1200 35 300 12 1	1,50	4,58	1200 35 300 15 2
APK 340	400	1,20	4,62	1200 35 400 12 1	1,50	5,77	1200 35 400 15 2
APK 350	500	1,50	6,65	1200 35 500 15 1	2,00	8,26	1200 35 500 20 2
APK 360	600	1,50	8,12	1200 35 600 15 1	2,00	10,83	1200 35 600 20 2

H: 35 - Perforated Cable Tray Load Graph

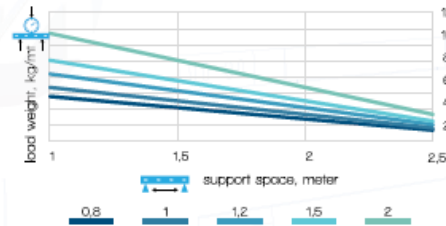

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/6th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety co-efficient: 1.7

Recommended support distance : 1.5m

Material & Finish Options:

- PG : pregalvanized steel EN 10142
- HDG : hot dip galvanized EN ISO 1461
- SS : stainless steel AISI 304
- AL : aluminum
- EP : epoxy painted - RAL



Non Perforated Cable Trays - ADK Series

Ağır Hizmet Deliksiz Kablo Kanal



Model	Width (W) (mm)	pregalvanized steel			hot dip galvanized finish		
		Thickness (T) (mm)	Weight (kg/m)	Order Code (PG)	Thickness (T) (mm)	Weight (kg/m)	Order Code (HDG)
ADK 305	50	0,80	0,88	1300 35 050 08 1	1,00	1,10	1300 35 050 10 2
ADK 310	100	0,80	1,18	1300 35 100 08 1	1,00	1,48	1300 35 100 10 2
ADK 315	150	1,00	1,88	1300 35 150 10 1	1,20	2,28	1300 35 150 12 2
ADK 320	200	1,00	2,28	1300 35 200 10 1	1,20	2,73	1300 35 200 12 2
ADK 325	250	1,00	2,87	1300 35 250 10 1	1,20	3,20	1300 35 250 12 2
ADK 330	300	1,20	3,67	1300 35 300 12 1	1,50	4,58	1300 35 300 15 2
ADK 340	400	1,20	4,82	1300 35 400 12 1	1,50	5,77	1300 35 400 15 2
ADK 350	500	1,50	6,95	1300 35 500 15 1	2,00	8,28	1300 35 500 20 2
ADK 360	600	1,50	8,12	1300 35 600 15 1	2,00	10,83	1300 35 600 20 2

Straight Connector and Fixing Element

Birleştirme ve Bağlantı Elemanları

35
Side Height



Material & Finish Options:
PG HDG SS

Model Number	L Length (L) (mm)	T Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KBE 235	130	1,20	0,06	8002 35 130 12 1	8002 35 130 12 2
BE 235	210	1,50	0,12	8002 35 210 15 1	8002 35 210 15 2
KBE 335	130	1,20	0,07	8003 35 130 12 1	8003 35 130 12 2
BE 335	210	1,50	0,15	8003 35 210 15 1	8003 35 210 15 2




Model Number	Size	In Pack set	Weight (kg/pcs)	Order Code (EG)	Order Code (DAPROMET)
CS ME	M6x5	200	0,012	8000 08 015 00 7	8000 08 015 00 2

Add on 90° Horizontal Corner Bend

90° Köşe Yatay Kanal Dönüş Eki

35 - Non Perforated Cable Tray Load Graph

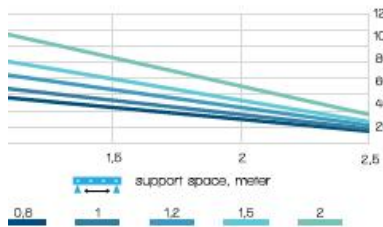


Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety coefficient: 1.7

Recommended support distance : 1.5m

Material & Finish Options:

- PG : pregalvanized steel EN 10142
- HDG : hot dip galvanized EN ISO 1461
- SS : stainless steel AISI 304
- AL : aluminum
- EP : epoxy painted - RAL



Model Number	R Radius (R)	T Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KABOE 3	50	1,50	0,293	1215 35 000 15 1	1215 35 000 15 2
KABOE1 3	150	1,50	0,422	1211 35 000 15 1	1211 35 000 15 2
KABOE2 3	300	1,50	0,846	1212 35 000 15 1	1212 35 000 15 2
KABOE3 3	450	1,50	1,452	1213 35 000 15 1	1213 35 000 15 2
KABOE4 3	600	1,50	2,241	1214 35 000 15 1	1214 35 000 15 2


Perforated Cable Trays - With Return Flanges - APK Series

60

Agr Hizmet Perfore Kablo Kanalı

Side Height


Create

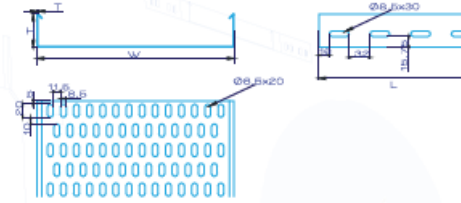

Cable Trays
Kablo Kanallı
H = 60
With Return Flanges
Ağır Hizmet Tipi

Model	W Width (W) (mm)	pregalvanized steel			hot dip galvanized finish		
		T Thickness (T) (mm)	Weight kg/m	Order Code (PG)	T Thickness (T) (mm)	Weight kg/m	Order Code (HDG)
APK 010	100	0,80	1,51	1200 00 100 08 1	1,00	1,88	1200 00 100 10 2
APK 015	150	1,00	2,28	1200 00 150 10 1	1,20	2,73	1200 00 150 12 2
APK 020	200	1,00	2,87	1200 00 200 10 1	1,20	3,20	1200 00 200 12 2
APK 025	250	1,00	3,06	1200 00 250 10 1	1,20	3,87	1200 00 250 12 2
APK 030	300	1,20	4,14	1200 00 300 12 1	1,50	5,18	1200 00 300 15 2
APK 040	400	1,20	5,08	1200 00 400 12 1	1,50	6,36	1200 00 400 15 2
APK 050	500	1,50	7,54	1200 00 500 15 1	2,00	10,06	1200 00 500 20 2
APK 060	600	1,50	8,71	1200 00 600 15 1	2,00	11,82	1200 00 600 20 2
APK 080	800	2,00	16,33	1200 00 800 20 1	2,00	16,33	1200 00 800 20 2
APK 075	750	2,00	13,88	1200 00 750 20 1	2,00	13,88	1200 00 750 20 2
APK 090	900	2,00	16,01	1200 00 900 20 1	2,00	16,01	1200 00 900 20 2

H: 60 - Perforated Cable Tray Load Graph

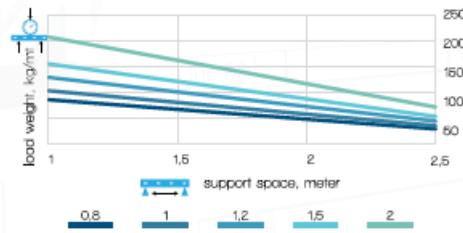

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety coefficient: 1.7

Recommended support distance : 1.5mt

Material & Finish Options:

- PG : pregalvanized steel EN 10142
- HDG : hot dip galvanized EN ISO 1461
- SS : stainless steel AISI 304
- AL : aluminum




Non Perforated Cable Trays - ADK Series

Agr Hizmet Deliksiz Kablo Kanalı



Model	Width (W) (mm)	pregalvanized steel			hot dip galvanized finish		
		Thickness (T) (mm)	Weight (kg/m ²)	Order Code (PG)	Thickness (T) (mm)	Weight (kg/m ²)	Order Code (HDG)
ADK 810	100	0,80	1,51	1300 80 100 08 1	1,00	1,88	1300 80 100 10 2
ADK 815	150	1,00	2,28	1300 80 150 10 1	1,20	2,73	1300 80 150 12 2
ADK 820	200	1,00	2,67	1300 80 200 10 1	1,20	3,20	1300 80 200 12 2
ADK 825	250	1,00	3,08	1300 80 250 10 1	1,20	3,67	1300 80 250 12 2
ADK 830	300	1,20	4,14	1300 80 300 12 1	1,50	5,18	1300 80 300 15 2
ADK 840	400	1,20	5,08	1300 80 400 12 1	1,50	6,38	1300 80 400 15 2
ADK 850	500	1,50	7,54	1300 80 500 15 1	2,00	10,05	1300 80 500 20 2
ADK 860	600	1,50	8,71	1300 80 600 15 1	2,00	11,62	1300 80 600 20 2
ADK 890	900	2,00	16,33	1300 80 900 20 1	2,00	16,33	1300 80 900 20 2
ADK 575	750	2,00	13,88	1300 50 750 20 1	2,00	13,88	1300 50 750 20 2
ADK 590	900	2,00	16,01	1300 50 900 20 1	2,00	16,01	1300 50 900 20 2

60 - Non Perforated Cable Tray Load Graph

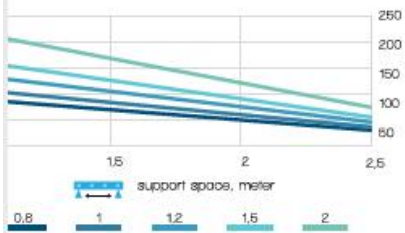

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety co-efficient: 1.7

Recommended support distance : 1.5mt

Material & Finish Options:


- PG : pregalvanized steel EN 10142
- HDG : hot dip galvanized EN ISO 1461
- SS : stainless steel AISI 304
- Al : aluminum
- FP : epoxy painted - RAL



Straight Connector and Fixing Element

Birleştirme ve Bağlantı Elemanları

60
Side Height

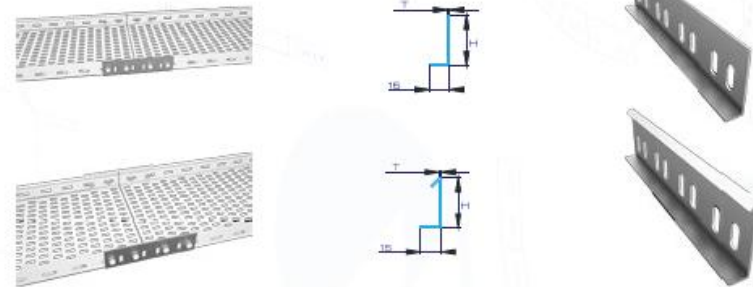

Model Number	Length (L) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KB250	130	1,20	0,08	8002 80 130 12 1	8002 80 130 12 2
BE 250	210	1,50	0,19	8002 80 210 15 1	8002 80 210 15 2
KB300	130	1,20	0,10	8003 80 130 12 1	8003 80 130 12 2
BE 300	210	1,50	0,21	8003 80 210 15 1	8003 80 210 15 2

Material & Finish Options:
PG HDG SS



Model Number	Size	In Pack set	Weight (kg/pcs)	Order Code (EG)	Order Code (DACHOMET)
CS M8	M8x15	200	0,012	9000 08 015 00 7	9000 08 015 00 2

Add on 90° Horizontal Corner Bend

90° Köşe Yatay Kanal Dönüş Eki




Model Number	Radius (R)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KAGOE 6	50	1,50	0,385	1215 80 000 15 1	1215 80 000 15 2
KAGOE1 6	150	1,50	0,529	1211 80 000 15 1	1211 80 000 15 2
KAGOE2 6	300	1,50	0,960	1212 80 000 15 1	1212 80 000 15 2
KAGOE3 6	450	1,50	1,633	1213 80 000 15 1	1213 80 000 15 2
KAGOE4 6	600	1,50	2,468	1214 80 000 15 1	1214 80 000 15 2

Cable Tray Cover - KK Series

Kablo Kanal Kapakı

15

Side Height



Model	W Width (W) (mm)	pregalvanised steel			hot dip galvanised finish		
		T Thickness (T) (mm)	Weight (kg/m)	Order Code (PG)	T Thickness (T) (mm)	Weight (kg/m)	Order Code (HDG)
KK 05	50	0,80	0,80	3000 15 050 08 1	1,00	0,83	3000 15 050 10 2
KK 10	100	0,80	0,82	3000 15 100 08 1	1,00	1,02	3000 15 100 10 2
KK 15	150	1,00	1,41	3000 15 150 10 1	1,20	1,70	3000 15 150 12 2
KK 20	200	1,00	1,81	3000 15 200 10 1	1,20	2,17	3000 15 200 12 2
KK 25	250	1,00	2,29	3000 15 250 10 1	1,20	2,73	3000 15 250 12 2
KK 30	300	1,20	3,11	3000 15 300 12 1	1,50	3,88	3000 15 300 15 2
KK 40	400	1,20	4,05	3000 15 400 12 1	1,50	5,06	3000 15 400 15 2
KK 50	500	1,20	4,99	3000 15 500 12 1	1,50	6,24	3000 15 500 15 2
KK 60	600	1,20	5,93	3000 15 600 12 1	1,50	7,42	3000 15 600 15 2
KK 75	300	1,20	3,11	3000 15 300 12 1	1,50	3,88	3000 15 300 15 2
KK 90	400	1,20	4,05	3000 15 400 12 1	1,50	5,06	3000 15 400 15 2

Standard length of trays 3000 mm, on request:
2000mm- 2400mm-2500mm


Covers fixed by 4 pcs of cover clamps KT/1 or 2 sets
of cover clamps KT/2

Material & Finish Options:

- PG : pregalvanised steel EN 10142
- HDG : hot dip galvanised EN ISO 1461
- SS : stainless steel AISI 304
- AL : aluminum
- EP : epoxy painted - RAL

Cover Clamp KT/1

Kapak Tutucu



Model Number	H Height (H) (mm)	T Plate Thick- (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KT/1 25	25	2,00	0,026	3901 25 000 20 1	3901 25 000 20 2
KT/1 35	35	2,00	0,029	3901 35 000 20 1	3901 35 000 20 2
KT/1 40	40	2,00	0,031	3901 40 000 20 1	3901 40 000 20 2
KT/1 50	50	2,00	0,034	3901 50 000 20 1	3901 50 000 20 2
KT/1 60	60	2,00	0,037	3901 60 000 20 1	3901 60 000 20 2
KT/1 75	75	2,00	0,041	3901 75 000 20 1	3901 75 000 20 2
KT/1 90	90	2,00	0,043	3901 90 000 20 1	3901 90 000 20 2
KT/1 100	100	2,00	0,046	3901 10 000 20 1	3901 10 000 20 2

Cable Tray Cover
Kablo Kanal Kapakı

H = 15