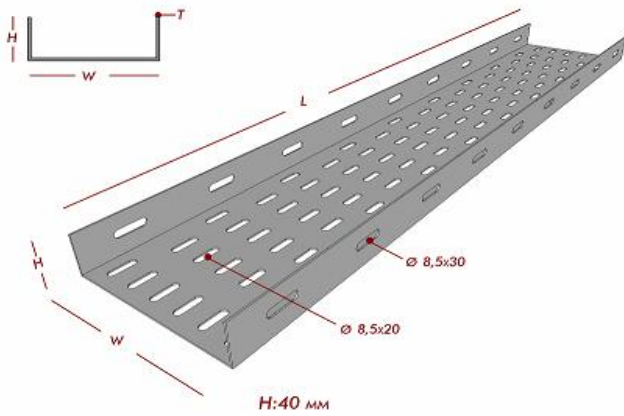


Normal Type Cable Trays - SPK Series

40
 Side Height


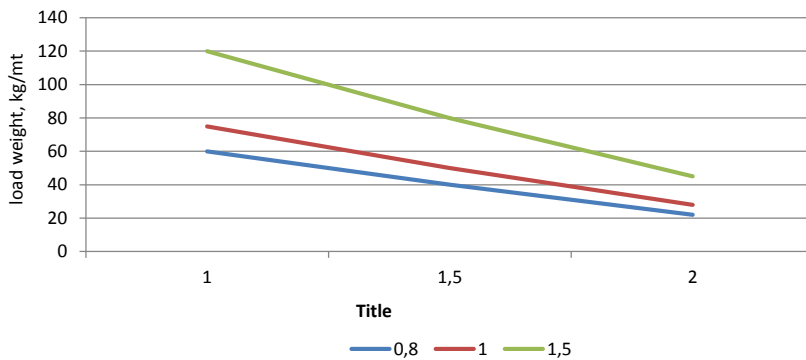
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/m	Order Code (PG)
SPK 405 08	50	0,80	0,816	1000 40 050 08 1
SPK 410 08	100	0,80	1,130	1000 40 100 08 1
SPK 416 08	160	0,80	1,507	1000 40 160 08 1
SPK 420 10	200	1,00	2,198	1000 40 200 10 1
SPK 426 10	260	1,00	2,669	1000 40 260 10 1
SPK 430 10	300	1,00	2,983	1000 40 300 10 1
SPK 440 15	400	1,50	5,652	1000 40 400 15 1
SPK 450 15	500	1,50	6,830	1000 40 500 15 1
SPK 460 15	600	1,50	7,654	1000 40 600 15 1

*Standard Length(L) 3000mm / on request 2500mm

*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts

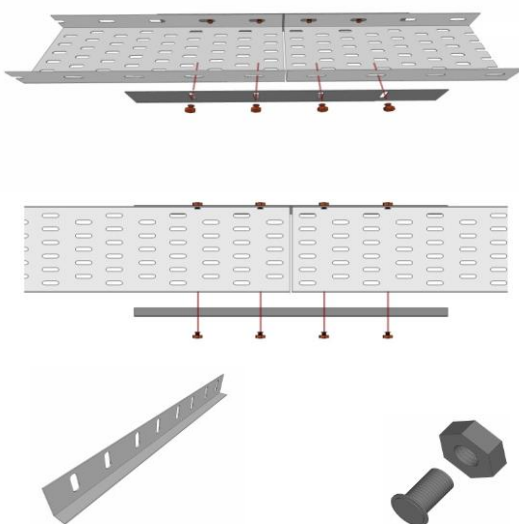
*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

H: 40 Normal Type Cable Tray Load Graph


Width, (W) mm	Useful Area cm ²
50	12,5
100	25
160	40
200	50
260	65
300	75
400	100
500	125
600	150

Straight Connector

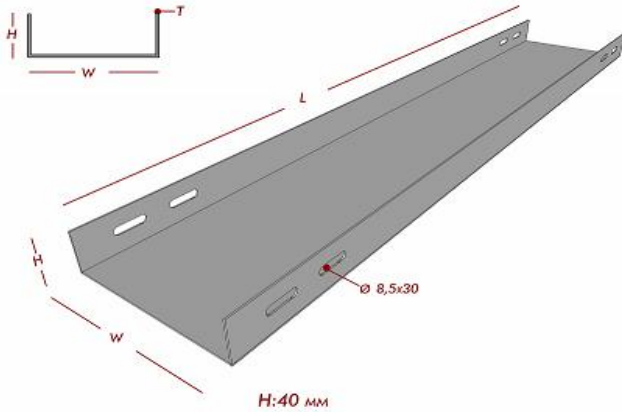


Model Number	Length (mm)	Plate Thick. (mm)	Weight kg/pcs	Order Code (PG)
KBE 240 10	120	1	0,052	8002 40 120 10 1
BE 240 10	240	1	0,108	8002 40 240 10 1
BE 240 15	240	1,5	0,162	8002 40 240 15 1

*Each Connector needs 4 sets of M8 Bolt & Nuts.....

Model Number	Length (mm)	Diameter, (mm)	Weight kg/set	Order Code (PG)
CS M8	15	8	0,012	9000 08 015 00 1

Normal Type Non Perforated Cable Trays - SDK Series

40
 Side Height


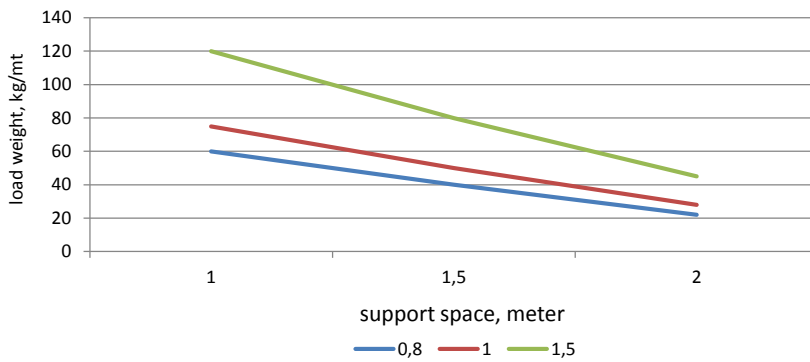
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/m	Order Code (PG)
SDK 405 08	50	0,80	0,816	1100 40 050 08 1
SDK 410 08	100	0,80	1,130	1100 40 100 08 1
SDK 416 08	160	0,80	1,507	1100 40 160 08 1
SDK 420 10	200	1,00	2,198	1100 40 200 10 1
SDK 426 10	260	1,00	2,669	1100 40 260 10 1
SDK 430 10	300	1,00	2,983	1100 40 300 10 1
SDK 440 15	400	1,50	5,652	1100 40 400 15 1
SDK 450 15	500	1,50	6,830	1100 40 500 15 1
SDK 460 15	600	1,50	7,654	1100 40 600 15 1

*Standard Length(L) 3000mm / on request 2500mm

*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts

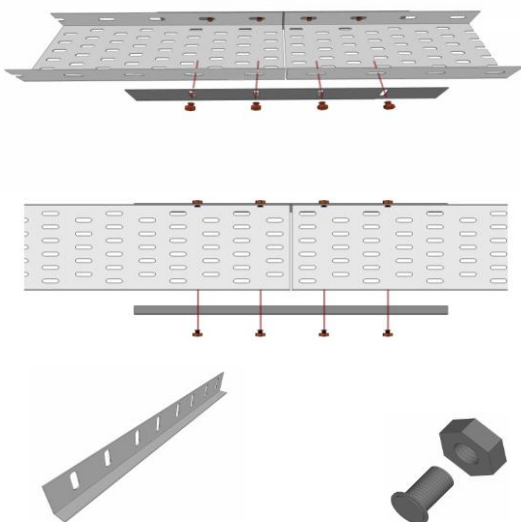
*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

H: 40 Normal Type Non Perforated Cable Tray Load Graph


Width, (W) mm	Useful Area cm ²
50	12,5
100	25
160	40
200	50
260	65
300	75
400	100
500	125
600	150

Straight Connector



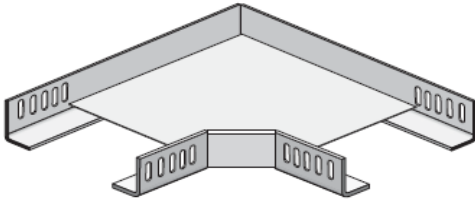
Model Number	Length (mm)	Plate Thick. (mm)	Weight kg/pcs	Order Code (PG)
KBE 240 10	120	1	0,052	8002 40 120 10 1
BE 240 10	240	1	0,108	8002 40 240 10 1
BE 240 15	240	1,5	0,162	8002 40 240 15 1

*Each Connector needs 4 sets of M8 Bolt & Nuts.....

Model Number	Length (mm)	Diameter, (mm)	Weight kg/set	Order Code (PG)
CS M8	15	8	0,012	9000 08 015 00 1


90° Horizontal Bend
40

Side Height



Order Code	Radius
------------	--------

1021.....	R:150
1022.....	R:300
1023.....	R:450
1024.....	R:600



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/m	Order Code (PG)
K90 405 10	50	1,00	0,417	1020 40 050 10 1
K90 410 10	100	1,00	0,543	1020 40 100 10 1
K90 416 10	160	1,00	0,745	1020 40 160 10 1
K90 420 12	200	1,20	1,094	1020 40 200 12 1
K90 426 12	260	1,20	1,450	1020 40 260 12 1
K90 430 12	300	1,20	1,725	1020 40 300 12 1
K90 440 15	400	1,50	3,181	1020 40 400 15 1
K90 450 15	500	1,50	4,441	1020 40 500 15 1
K90 460 15	600	1,50	5,936	1020 40 600 15 1

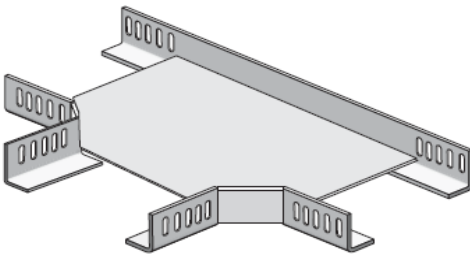
*No connectors required for fixing to trays

*Required 8 sets of M8 Bolt & Nuts

*Please specify A and B dimensions if order unequal bend / different radius


*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Tee Horizontal Bend


Order Code	Radius
------------	--------

1031.....	R:150
1032.....	R:300
1033.....	R:450
1034.....	R:600



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KT 405 10	50	1,00	0,587	1030 40 050 10 1
KT 410 10	100	1,00	0,703	1030 40 100 10 1
KT 416 10	160	1,00	0,894	1030 40 160 10 1
KT 420 12	200	1,20	1,263	1030 40 200 12 1
KT 426 12	260	1,20	1,605	1030 40 260 12 1
KT 430 12	300	1,20	1,870	1030 40 300 12 1
KT 440 15	400	1,50	3,333	1030 40 400 15 1
KT 450 15	500	1,50	4,563	1030 40 500 15 1
KT 460 15	600	1,50	6,029	1030 40 600 15 1

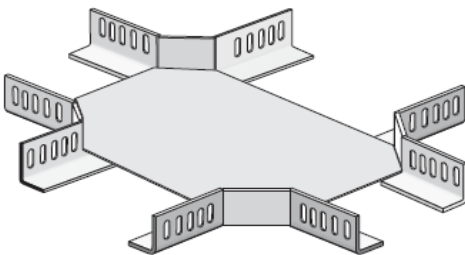
*No connectors required for fixing to trays

*Required 12 sets of M8 Bolt & Nuts

*Please specify A, B and C dimensions if order unequal bend / different radius


*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Crossing Horizontal Bend


Order Code	Radius
------------	--------

1041.....	R:150
1042.....	R:300
1043.....	R:450
1044.....	R:600



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KD 405 10	50	1,00	0,786	1040 40 050 10 1
KD 410 10	100	1,00	0,892	1040 40 100 10 1
KD 416 10	160	1,00	1,071	1040 40 160 10 1
KD 420 12	200	1,20	1,466	1040 40 200 12 1
KD 426 12	260	1,20	1,794	1040 40 260 12 1
KD 430 12	300	1,20	2,050	1040 40 300 12 1
KD 440 15	400	1,50	3,528	1040 40 400 15 1
KD 450 15	500	1,50	4,729	1040 40 500 15 1
KD 460 15	600	1,50	6,165	1040 40 600 15 1

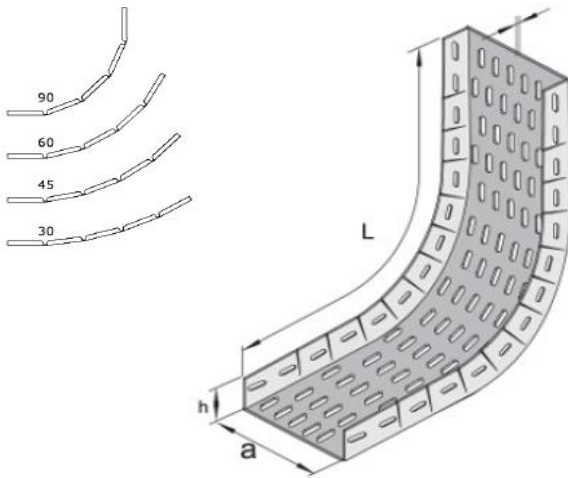
*No connectors required for fixing to trays

*Required 16 sets of M8 Bolt & Nuts

*Please specify A, B and C dimensions if order unequal bend / different radius

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

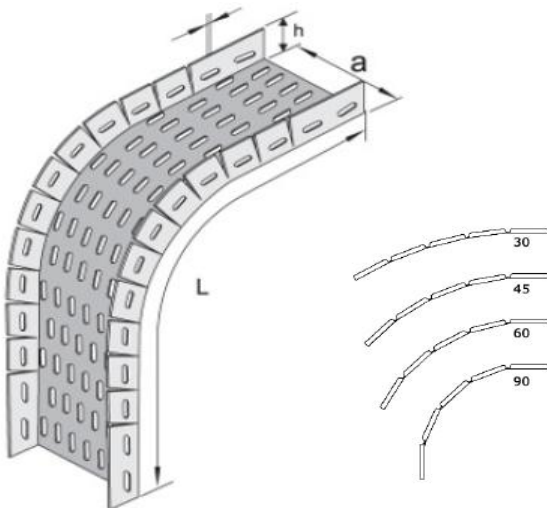
PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

90° Vertical Bend
40
 Side Height


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KIB 405 08	50	0,80	0,531	1050 40 050 08 1
KIB 410 08	100	0,80	0,735	1050 40 100 08 1
KIB 416 08	160	0,80	0,980	1050 40 160 08 1
KIB 420 10	200	1,00	1,429	1050 40 200 10 1
KIB 426 10	260	1,00	1,735	1050 40 260 10 1
KIB 430 10	300	1,00	1,939	1050 40 300 10 1
KIB 440 15	400	1,50	4,804	1050 40 400 15 1
KIB 450 15	500	1,50	5,805	1050 40 500 15 1
KIB 460 15	600	1,50	6,806	1050 40 600 15 1

*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts
 *Flexible Vertical bend delivered in plain position and may be used for 30, 60, 90 degrees
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

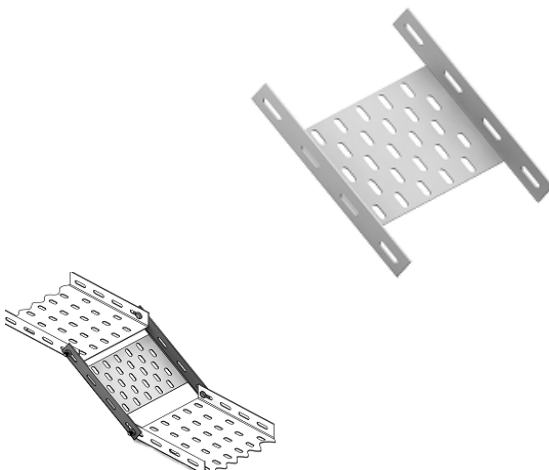
PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

90° Vertical Bend


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KDB 405 08	50	0,80	0,531	1050 40 050 08 1
KDB 410 08	100	0,80	0,735	1050 40 100 08 1
KDB 416 08	160	0,80	0,980	1050 40 160 08 1
KDB 420 10	200	1,00	1,429	1050 40 200 10 1
KDB 426 10	260	1,00	1,735	1050 40 260 10 1
KDB 430 10	300	1,00	1,939	1050 40 300 10 1
KDB 440 15	400	1,50	4,804	1050 40 400 15 1
KDB 450 15	500	1,50	5,805	1050 40 500 15 1
KDB 460 15	600	1,50	6,806	1050 40 600 15 1

*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts
 *Flexible Vertical bend delivered in plain position and may be used for 30, 60, 90 degrees
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Modular Adjustable Riser Bend


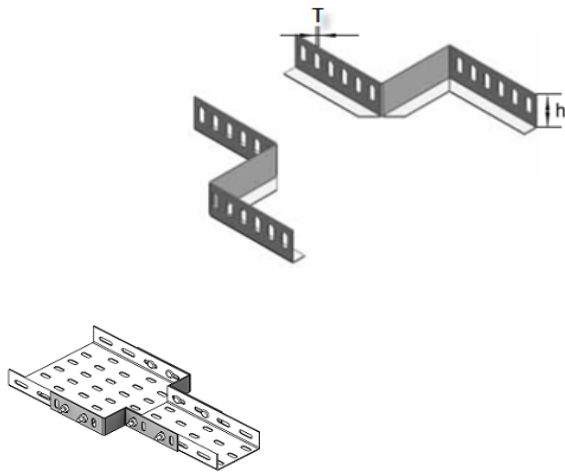
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KMB 405 08	50	0,80	0,127	1060 40 050 08 1
KMB 410 08	100	0,80	0,168	1060 40 100 08 1
KMB 416 08	160	0,80	0,217	1060 40 160 08 1
KMB 420 10	200	1,00	0,312	1060 40 200 10 1
KMB 426 10	260	1,00	0,373	1060 40 260 10 1
KMB 430 10	300	1,00	0,414	1060 40 300 10 1
KMB 440 15	400	1,50	0,774	1060 40 400 15 1
KMB 450 15	500	1,50	0,927	1060 40 500 15 1
KMB 460 15	600	1,50	1,080	1060 40 600 15 1

*No connectors required for fixing to trays
 *Required 4 sets of M8 Bolt & Nuts for each modul
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Middle Reducer Connection (set)
40

Side Height

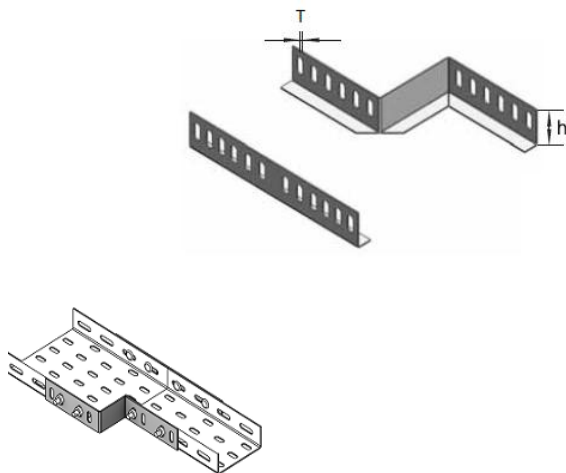


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/set	Order Code (PG)
RO 404 08	40	1,50	0,254	8010 40 040 15 1
RO 405 08	50	1,50	0,259	8010 40 050 15 1
RO 406 08	60	1,50	0,264	8010 40 060 15 1
RO 408 10	80	1,50	0,273	8010 40 080 15 1
RO 410 10	100	1,50	0,283	8010 40 100 15 1
RO 416 10	160	1,50	0,311	8010 40 160 15 1
RO 420 15	200	1,50	0,330	8010 40 200 15 1
RO 430 15	300	1,50	0,377	8010 40 300 15 1
RO 440 15	400	1,50	0,424	8010 40 400 15 1
RO 450 15	500	1,50	0,471	8010 40 500 15 1

*Each Connector Set needs 8 sets of M8 Bolt & Nuts.....

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

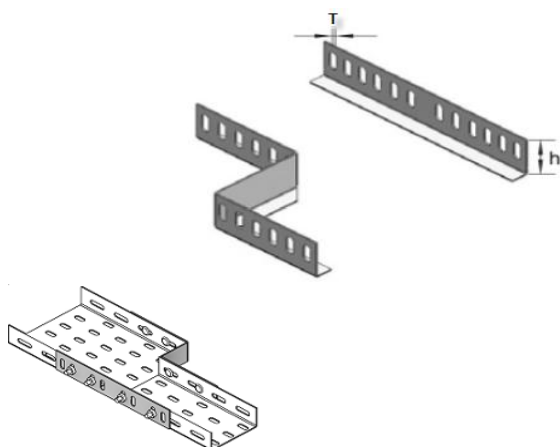
Left Reducer Connection (set)


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/set	Order Code (PG)
RL 404 08	40	1,50	0,254	8020 40 040 15 1
RL 405 08	50	1,50	0,259	8020 40 050 15 1
RL 406 08	60	1,50	0,264	8020 40 060 15 1
RL 408 10	80	1,50	0,273	8020 40 080 15 1
RL 410 10	100	1,50	0,283	8020 40 100 15 1
RL 416 10	160	1,50	0,311	8020 40 160 15 1
RL 420 15	200	1,50	0,330	8020 40 200 15 1
RL 430 15	300	1,50	0,377	8020 40 300 15 1
RL 440 15	400	1,50	0,424	8020 40 400 15 1
RL 450 15	500	1,50	0,471	8020 40 500 15 1

*Each Connector Set needs 8 sets of M8 Bolt & Nuts.....

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

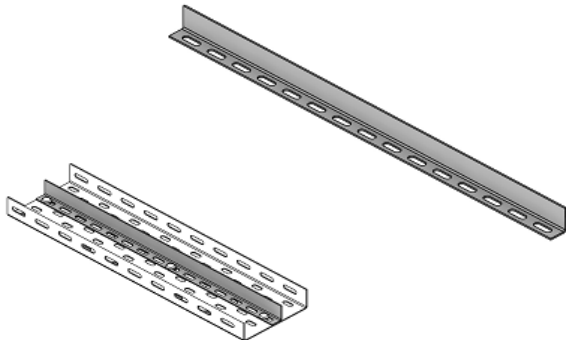
Right Reducer Connection (set)


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/set	Order Code (PG)
RG 404 08	40	1,50	0,254	8030 40 040 15 1
RG 405 08	50	1,50	0,259	8030 40 050 15 1
RG 406 08	60	1,50	0,264	8030 40 060 15 1
RG 408 10	80	1,50	0,273	8030 40 080 15 1
RG 410 10	100	1,50	0,283	8030 40 100 15 1
RG 416 10	160	1,50	0,311	8030 40 160 15 1
RG 420 15	200	1,50	0,330	8030 40 200 15 1
RG 430 15	300	1,50	0,377	8030 40 300 15 1
RG 440 15	400	1,50	0,424	8030 40 400 15 1
RG 450 15	500	1,50	0,471	8030 40 500 15 1

*Each Connector Set needs 8 sets of M8 Bolt & Nuts.....

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

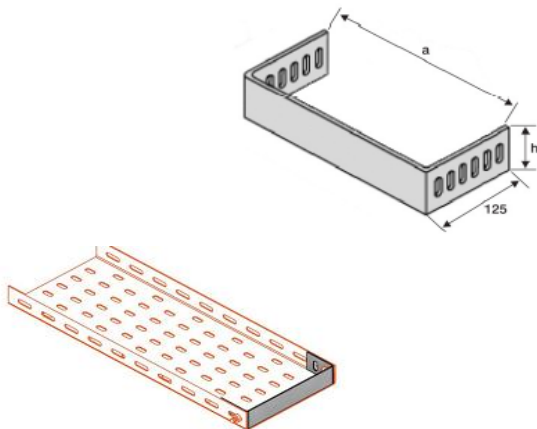
PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Barrier Strip
40
 Side Height


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight (kg/m)	Order Code (PG)
SEP 140 08	15	0,80	0,345	8111 40 000 08 1
SEP 140 09	15	0,90	0,389	8111 40 000 09 1
SEP 140 10	15	1,00	0,432	8111 40 000 10 1
SEP 140 12	15	1,20	0,518	8111 40 000 12 1
SEP 140 15	15	1,50	0,648	8111 40 000 15 1
SEP 140 20	15	2,00	0,864	8111 40 000 20 1

*Standard Length 3000mm / on request 2500mm
 *Each Separator needs M8x15mm Bolt & Nuts set for fixing to trays
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

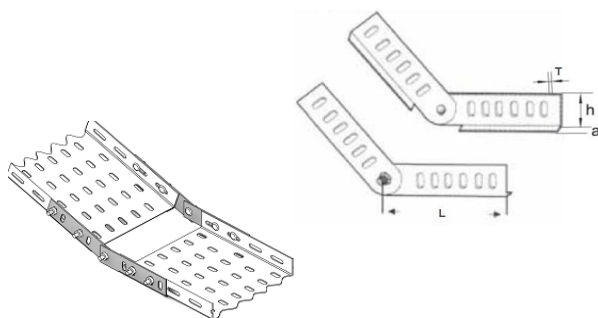
PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Stop End


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)
SON 405 08	50	1,50	0,141	8210 40 050 15 1
SON 410 08	100	1,50	0,165	8210 40 100 15 1
SON 416 08	160	1,50	0,193	8210 40 160 15 1
SON 420 10	200	1,50	0,212	8210 40 200 15 1
SON 426 10	260	1,50	0,240	8210 40 260 15 1
SON 430 10	300	2,00	0,345	8210 40 300 20 1
SON 440 15	400	2,00	0,408	8210 40 400 20 1
SON 450 15	500	2,00	0,471	8210 40 500 20 1
SON 460 15	600	2,00	0,534	8210 40 600 20 1

*Each Stop End needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

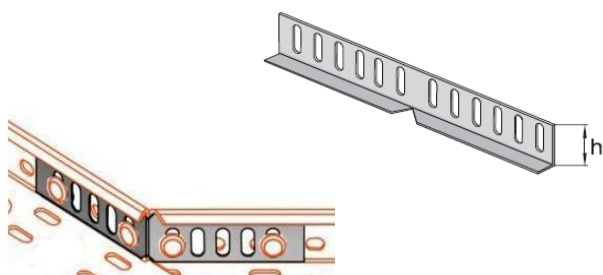
PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Adjustable Vertical Connector


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)
BDD 240 12	300	1,20	0,155	8322 40 300 12 1
BDD 240 15	300	1,50	0,194	8322 40 300 15 1
BDD 240 20	300	2,00	0,259	8322 40 300 20 1

*Each Adjustable Connector needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Adjustable Horizontal Connector


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)
BYD 140 08	300	0,80	0,104	8311 40 300 08 1
BYD 140 10	300	1,00	0,130	8311 40 300 10 1
BYD 140 15	300	1,50	0,194	8311 40 300 15 1

*Each Adjustable Connector needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray
 *PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+