

MASTER PL-C 2 Pin

MASTER PL-C 18W/830/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

-2 hr
hı

• Light Technical Characteristics

•	
Color Code	830 [CCT of 3000K]
Color Rendering Index	82 Ra8
	\A/ \A/I :-
Color Designation	Warm White
(text)	
Color Temperature	3000 K
Luminous Flux EM	1200 Lm
25°C, Rated	
Luminous Flux EM	1200 Lm
25°C, Nominal	
Lum Efficacy Rated	67 Lm/W
EM 25°C	
LLMF EM 2000h	92 %
Rated	
LLMF EM 4000h	87 %
Rated	
LLMF EM 6000h	84 %
Rated	

LLMF EM 8000h	81 %
Rated	20.0
Design Temperature	28 C 440 -
Chromaticity Coordinate X	440 -
Chromaticity Coor-	403 -
dinate Y	105

• Electrical Characteristics

Lamp Wattage	18 W
Lamp Wattage EM	18 W
25°C, Nominal	
Lamp Wattage EM	17.9 V
25°C, Rated	
Lamp Voltage EM	95 V
25°C	
Lamp Current EM	0.230 /
25°C	
Dimmable	No

• Environmental Characteristics

Energy Efficiency	В
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	_
Energy consumption	22 kWh
kWh/1000h	

Product Dimensions

Base Face to Base	109./ (max) mm
Face A	
Insertion Length B	128.0 (max) mm
Overall Length C	150.4 (max) mm
Diameter D	27.1 (max) mm





MASTER PL-C 2 Pin

Diameter D1 27.1 (max) mm

• Product Data

Order code 927905783001 Full product code 927905783001

MASTER PL-C 18W/830/2P 1CT MASTER PL-C 18W/830/2P 1CT/ Full product name Order product name

5X10CC

Pieces per pack Packing configuration Packs per outerbox 5X10CC 50

8711500269232 Bar code on pack -

EAN1

8711500269201 Bar code on intermediate packing -

EAN2

Bar code on 8711500269171

outerbox - EAN3

927905783001 Logistic code(s) -

12NC

ILCOS code FSQ-18/30/1B-I-G24d=2


Net weight per piece 0.069 kg

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position


• Dimming is not possible

Dimensional drawing

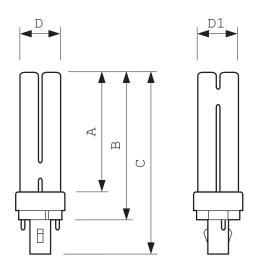


MASTER PL-C 18W/830/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 18W/830/2P	109.7	128.0	150.4	27.1	27.1



MASTER PL-C 2 Pin

Photometric data

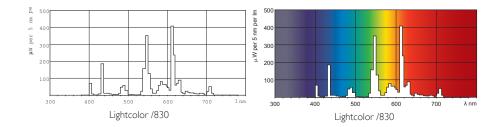



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.