


TEU RAPID PE FILET INTERIOR

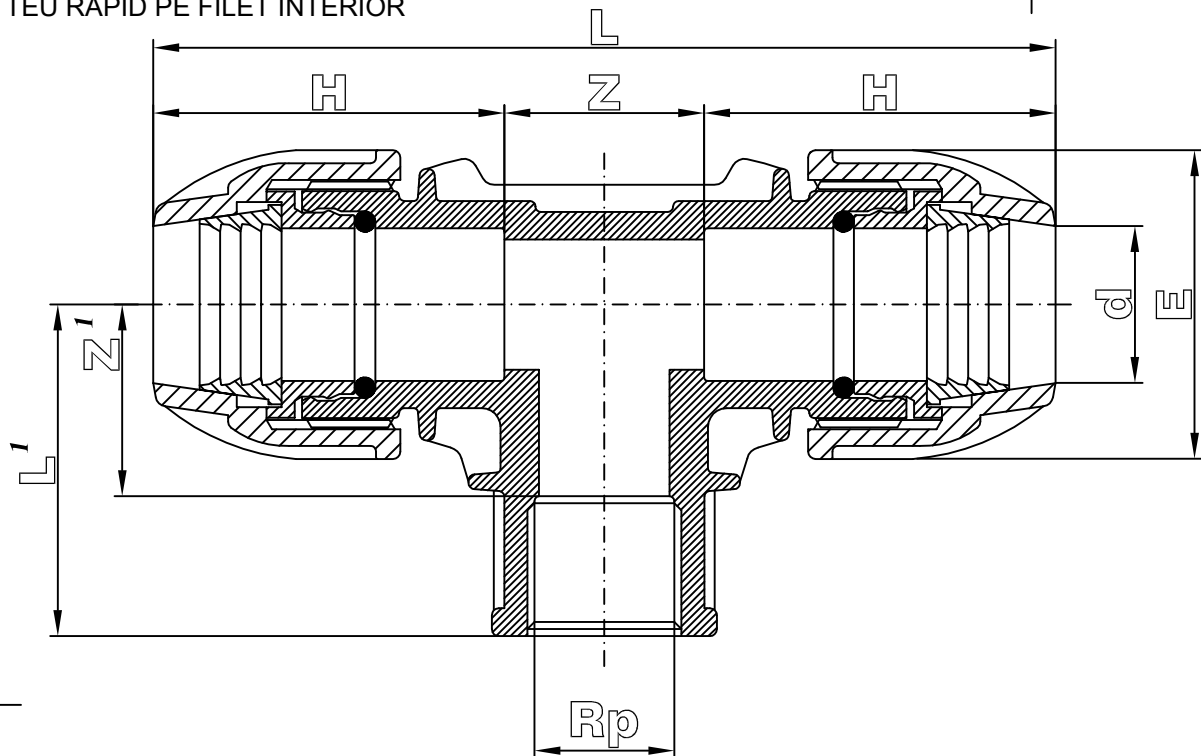

The FILBO connecting joint is designed and manufactured in according to the international standard norms:

- ISO 3458
- ISO 3459
- ISO 3501
- ISO 3503
- ISO 14236
- DIN 8076-3
- KIWA BRLK 534-01
- UNI 9561
- UNI 9562

The connecting parts of the body with the PE pipes are designed in according to the international standard norms:


- ISO DIS 3607
- DIN 8072
- DIN 8074
- UNI 7611
- UNI 7990

Male and female threaded adaptors are designed in according to the international standard norms:

- ISO 7
- UNI ISO 7-1
- BS 21

| dxRp       | Z min. | H   | Toller. | L   | Toller. | Z' min. | L' | Toller. | E   | Toller. | g    |
|------------|--------|-----|---------|-----|---------|---------|----|---------|-----|---------|------|
| 20x1/2"    | 28     | 58  | +3 mm   | 144 | +3 mm   | 27      | 50 | +3 mm   | 47  | +0.30   | 80   |
| 20x3/4"    | 28     | 58  | +3 mm   | 144 | +3 mm   | 31      | 54 | +3 mm   | 47  | +0.30   | 85   |
| 25x1/2"    | 32     | 67  | +3 mm   | 166 | +3 mm   | 34      | 57 | +3 mm   | 54  | +0.30   | 115  |
| 25x3/4"    | 32     | 67  | +3 mm   | 166 | +3 mm   | 34      | 57 | +3 mm   | 54  | +0.30   | 120  |
| 25x1"      | 32     | 67  | +3 mm   | 166 | +3 mm   | 36      | 59 | +3 mm   | 54  | +0.30   | 130  |
| 32x3/4"    | 40     | 77  | +3 mm   | 194 | +3 mm   | 44      | 67 | +3 mm   | 66  | +0.30   | 200  |
| 32x1"      | 40     | 77  | +3 mm   | 194 | +3 mm   | 41      | 64 | +3 mm   | 66  | +0.30   | 210  |
| * 32x1"1/4 | 40     | 77  | +3 mm   | 194 | +3 mm   | 41      | 65 | +3 mm   | 66  | +0.30   | 230  |
| 40x1"      | 54     | 96  | +5 mm   | 246 | +5 mm   | 52      | 76 | +5 mm   | 83  | +0.50   | 440  |
| * 40x1"1/4 | 54     | 96  | +5 mm   | 246 | +5 mm   | 49      | 73 | +5 mm   | 83  | +0.50   | 460  |
| * 40x1"1/2 | 54     | 96  | +5 mm   | 246 | +5 mm   | 47      | 72 | +5 mm   | 83  | +0.50   | 470  |
| * 50x1"1/2 | 66     | 110 | +5 mm   | 286 | +5 mm   | 59      | 88 | +5 mm   | 98  | +0.50   | 710  |
| * 50x2"    | 66     | 110 | +5 mm   | 286 | +5 mm   | 58      | 83 | +5 mm   | 98  | +0.50   | 750  |
| * 63x2"    | 76     | 124 | +5 mm   | 324 | +5 mm   | 65      | 95 | +5 mm   | 116 | +0.50   | 1130 |

\* With AISI 430 Stainless Steel reinforcing ring.

|   |                    |   |            |
|---|--------------------|---|------------|
| <br>6, Tsar Ivan Shishman Str.<br>Varna - Bulgaria |                    | DENOMINAZIONE<br>Female Tee Data Sheet. |            |
|   |                    | FISA TEU RAPID FI                       |            |
| Designer  |                    | Raw Material                            | Drawing N° |
| SCALA<br>//   | Date<br>05.06.2007 | Injection Machine                       |            |
|   |                    |   | DSH 0010   |